



Corodrain

Roof Drainage

Dry Fix Joining Gutter

- Dry fix mortar free solution.
- Manufactured from GRP.
- High profile & low profile option available.



2 Height options available



ariel[®]

www.arielplastics.com



Corodrain

Roof Drainage



Corodrain Dry Fix Joining Gutters are manufactured in high performance GRP, a tough and long lasting alternative to lead, which is cheaper and less prone to theft or vandalism.



The maintenance free joining gutters successfully create a weatherproof joint between two different roof coverings on tiled pitched roofs, without the need for mortar. This enables simple and easy on site installation.

Two profile options are available with central upstands at 100mm and 70mm. Corodrain Dry

Fix Joining Gutters can be retro fitted to existing roofs or installed on a new roof, with minimal disturbance to adjacent roof and adjoining property.


Dry Fix Joining Gutter Range

1 Dry Fix Joining Gutter High Profile (100mm)

DBG30HW100



Manufactured with a central upstand of 100mm and suitable for high profile tiles on one or both sides, flat interlocking and plain tiles.

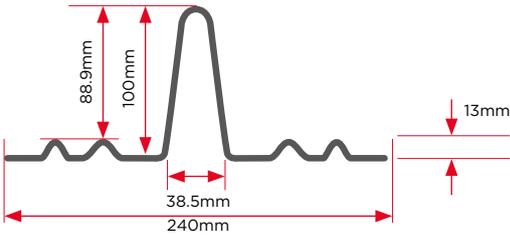


2 Dry Fix Joining Gutter Low Profile (70mm)

DBG30HW70



Manufactured with a central upstand of 70mm suitable for slates, low profile, flat interlocking and plain tiles.

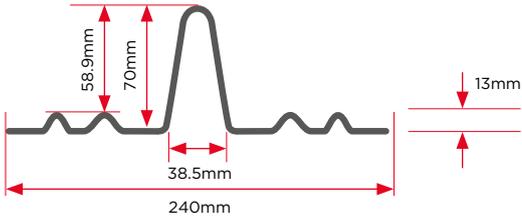


Joining Gutter Specification

Width	240mm
Thickness	2mm
Standard Weight	3.6kg/m ²
Length	3000mm
Colour	Grey
Material	GRP
Fire Rating	SAB to BS476 Part3 Class 3 to BS476 Part7



Installation

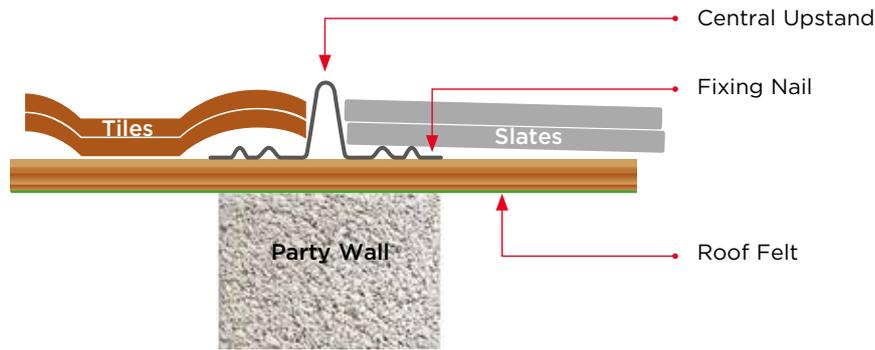

Preparation

- Make good underlay and battens over the party wall.
- Prepare adjoining roof – renew nails, cut slates or tiles to middle of party wall.

Positioning


- Fit Joining Gutter under the adjoining slates or tiles to the middle of the party wall, ensuring adjoining roof tile fit against the central upstand of the joining gutter. Repair, replace, secure and make good adjoining roof tiling where necessary.
- Allow 150mm overlap between lengths and terminate to ensure effective discharge into gutter.

Fixing

- Nail in place.
- Butt new roof up to central upstand, ensure all tiles and part tiles are securely fixed as required following Regulations and tile manufacturer's instructions.

Installing a firebreak

- Roofing battens need to be cut back leaving a gap of 75mm across the party wall.
- A bed of mortar must be laid in the gap, from ridge to eaves along the party wall, (joining the party wall to the bottom of the gutter).
- Then fit Joining Gutter as above.

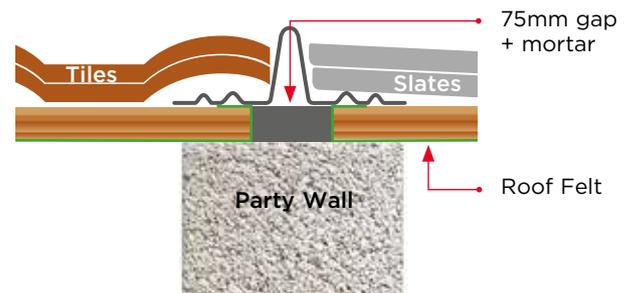

Speedwell Industrial Estate
 Staveley
 Derbyshire
 S43 3JP

Tel: 01246 281111
 Fax: 01246 561111
 Email: info@arielplastics.com

Orderline email:
sales@arielplastics.com

Ariel Plastics' comprehensive product range features extensive options in roof ventilation, roof drainage and roofing membranes. To view the complete range visit www.arielplastics.com.

Blairlinn Road
 Cumbernauld
 Glasgow
 G67 2TF

Tel: 01236 725536
 Fax: 01236 725871
 Email: info@arielplastics.com

Orderline email:
sales@arielplastics.com



Q09125

All reasonable care has been taken in the compilation of the information contained within this brochure. Ariel Plastics reserves the right to amend specifications and prices without prior notice. All recommendations on the use of our products are made without guarantee as conditions of use are beyond the control of Ariel Plastics. It is the customer's responsibility to ensure that the product is fit for its intended purpose and that the actual conditions of use are suitable.