

TYPES AND CHOICE OF LOFT LADDER



PASSIVE HOUSE

WOODEN

MAXIMUM LOAD
160 kg

U=0.51
LOFT LADDER
W/m²K

SECTION

LWT
PASSIVE HOUSE

PASSIVE HOUSE
INSULATION KIT



Page 18

FIRE-RESISTENT



EI₁/EI₂ 45MIN

WOODEN

MAXIMUM LOAD
160 kg

U=0.6
LOFT LADDER
W/m²K

SECTION

LWF 45

COMFORT
AND FUNCTIONALITY



Page 20

METAL

MAXIMUM LOAD
200 kg

U=0.6
LOFT LADDER
W/m²K

SECTION

LMF 45

AVAILABLE IN VERSION
FOR HIGH ROOMS



Page 36

EI₂ 60 MIN

METAL

MAXIMUM LOAD
200 kg

U=1.8
HATCH
W/m²K

SCISSORS

LSF

QUICK INSTALLATION AND
SMALL BOX DIMENSIONS



Page 46

EI₂ 120 MIN

METAL

MAXIMUM LOAD
200 kg

U=0.79
HATCH
W/m²K

SECTION

LMF

BEST FIRE RESISTANCE ON
THE MARKET












Page 38

L-SHAPED COMBINATION DOORS

TYPES AND CHOICE OF L-SHAPED DOOR

In addition to having a wide range of loft ladders FAKRO also manufactures combination loft doors for installation in walls. These are used to provide access to unused space behind a wall or under stairs. Three models are available, the first and most basic model, the **DWK** insulating door having a 3.6cm thick sash. For added thermal efficiency and airtightness the **DWT** provides a U-value of 0.6 and offers Class 4: EN 12207 performance. Where fire resistance is required, the **DWF** offers double-sided protection (fire classification EI,45 EN 13501-2), as well as exceptional airtightness and thermal insulation.

INSULATED	HIGHLY ENERGY EFFICIENT	FIRE-RESISTANT
DWK	DWT	DWF
	 	  
		
page 48	page 50	page 52

* internal tests of the middle part of the sash

** manufacturer's internal tests for the sash

*** manufacturer's internal testing

FOLDING LOFT LADDERS

Create safe and easy access to your loft space without the need for costly and oversized staircases. FAKRO loft ladders satisfy all technical and safety requirements whilst maximizing ease of use and comfort.



SPACE SAVINGS

Thanks to their clever design, FAKRO loft ladders require little “swing space”. The ladder is mounted on the hatch so that, when folded, its sections are neatly concealed inside the loft space.

EASE OF INSTALLATION

To make installation fast and easy, FAKRO loft ladders feature a “click” fixing, enabling some ladders to be fitted by a single person. Additionally, FAKRO loft ladders can be adjusted to suit any ceiling height.

EASE OF OPERATION

The innovative spring-assisted opening mechanism (on some models ladder sections are also sprung) greatly eases ladder use. An opening rod is also supplied with every ladder.

ADDITIONAL EQUIPMENT

In order to maximise comfort and accelerate installation of the loft ladder, additional accessories are available.

WARRANTY

FAKRO loft ladders come with a **3-year warranty.**



**WOODEN SECTION
LOFT LADDERS**

**SECTION
LOFT LADDERS**

► BOX

The loft ladder has a pine or metal frame integrated within its box. It comes complete with linings which, in combination with a quick installation system gets the job done fast! The peripheral seal is used to ensure the ladder aperture remains airtight.

► HATCH MECHANISM

The used mechanism significantly simplifies ladder operation. The hatch after unlocking opens slowly without causing any hazard to the user. In addition, the mechanism maintains the hatch in fully open position, prevents it from spontaneous closing during unfolding and folding the ladder.

► HARDWARE

The patented corner hinge and spring mechanism provides added rigidity to the box and prevents distortion.

► HATCH

The sandwich type hatch can be insulated or fire-resistant.

► TREAD

The grooves on the tread surface protect the user from accidental slipping while using the ladder.

► STILE ENDS

made from heavy duty PVC, these protect the floor surface from scratching while also adding to the ladder's overall stability (refers to 3-section ladders)

► LADDER

The ladder is made of high quality pine and consists of three or four segments.

WOODEN
LOFT LADDERS



WOODEN FOLDING SECTION LOFT LADDERS

LWK
KOMFORT

STANDARD
**EN
14975**

U=1.1
W/m²K

The **LWK Komfort** ladder's innovative design ensures ease of use, a high insulation value and quick installation. It is equipped with an aesthetically pleasing, smooth white finish to the hatch, and a handrail as standard.

Insulated white hatch and handrail.

As the hatch is opened the hinge moves it away from the ladder, thus increasing space for added convenience.

CLICK

Light hatch weight and method of 'click fixing' makes installation very simple.



stile ends (only in 3-section version)



handrail



white hatch



non-slip treads set flush with ladder strings



peripheral seal



easy installation



possibility of installing additional accessories, pages 54-59


Technical specification:
permissible load of 160 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LWK KOMFORT LADDER DIAGRAM

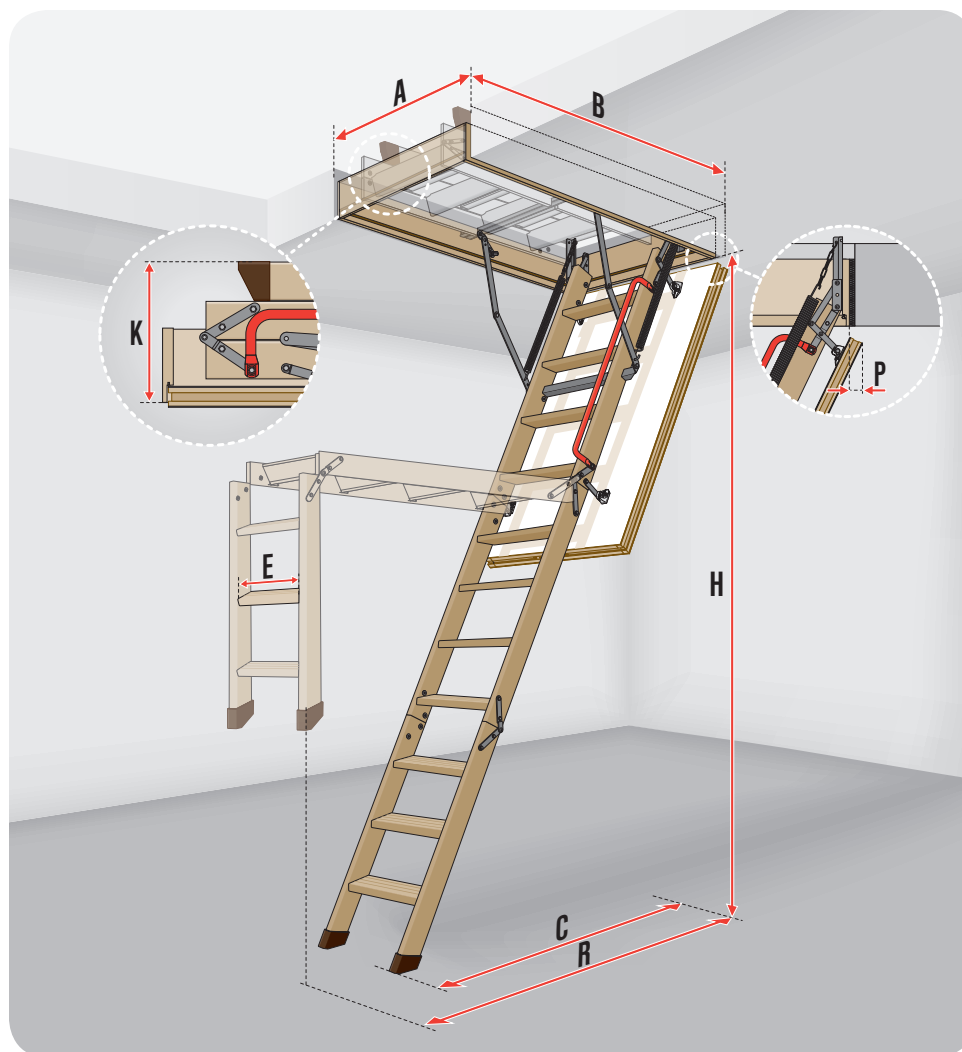

LWK Komfort LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	55x111	60x94	60x100	60x111	60x120	60x130	70x94	70x100	70x111	70x120	70x130	70x140	60x130	60x140	70x130	70x140
Maximum room height [cm]	H	280												305			
Minimum room height [cm]*	H _{min.}	232	250		232			250		232				246			
Box external dimensions [cm]		53x109.4	58x92.4	58x98.4	58x109.4	58x118.4	58x128.4	68x92.4	68x98.4	68x109.4	68x118.4	68x128.4	68x138.4	58x128.4	58x138.4	68x128.4	68x138.4
Internal box dimensions [cm]		49x105	54x88	54x94	54x105	54x114	54x124	64x88	64x94	64x105	64x114	64x124	64x134	54x124	54x134	64x124	64x134
Folded ladder height [cm]	K	27	35		27			35		27							
Swing space [cm]	R	153	128		153	156		128		153	156			175			
Distance after ladder unfolding [cm]	C	113	114		113	120		114		113	120			135			
Hatch retraction after opening [cm]	P	4															
Box height [cm]		14															
Number of segments		3	4		3			4		3							

LADDER PARAMETERS

Tread length [cm]	E	30	34
Tread width [cm]			8
Distance between treads [cm]			25
Tread thickness [cm]			2

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER DIMENSIONS

Commercial sizes [cm]		55x111	60x94	60x100	60x111	60x120	60x130	70x94	70x100	70x111	70x120	70x130	70x140	60x130	60x140	70x130	70x140
Room height [cm]	H	280												305			
Code		864521	864507	864506	864504	864501	864502	864502	864517	864516	864514	864511	864512	864551	864552	864553	864554

For LWK Komfort non-standard sizes page 24

WOODEN
LOFT LADDERS



WOODEN SECTION LOFT LADDERS

NEW!

**LWZ
PLUS**

STANDARD
**EN
14975**

U=1.1
W/m²K

The **LWZ Plus** loft ladder combines the advantages of the latest design and quick fitting. The integrated steel frame, installation brackets and metal architrave lining make installation simple and finish off any imperfections and gaps between frame and ceiling.

Quick-fit brackets built into steel frame speeds up installation and makes levelling within the ceiling easy.

Integrated architrave lining gives a highly pleasing finish to the installed ladder.

Hinge controls hatch movement and moves it away from the ladder sections for greater ease of use.



stile ends



white hatch



architrave



peripheral seal



handrail



non-slip treads



system of quick installation in the ceiling



possibility of installing additional accessories pages 54-59


Technical specification:
permissible load of 160 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



**3 years
WARRANTY**

LWZ PLUS LADDER DIAGRAM

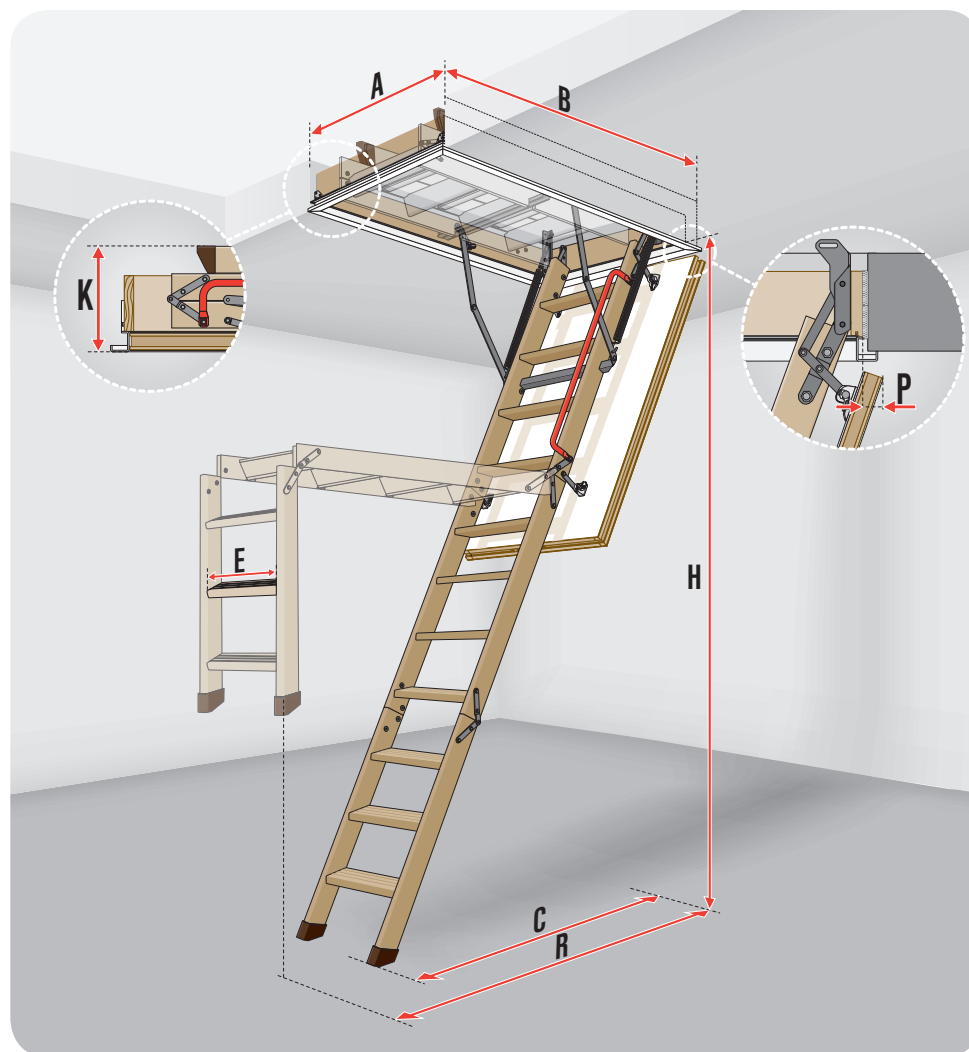

LWZ Plus LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Maximum room height [cm]	H	280					305	
Minimum room height [cm]*	H _{min.}	232					246	
Box external dimensions [cm]		58.8 x 118.8	68.8 x 118.8	68.8 x 128.8	68.8 x 138.8	58.8 x 128.8	68.8 x 128.8	68.8 x 138.8
Internal box dimensions [cm]		54 x 114	64 x 114	64 x 124	64 x 134	54 x 124	64 x 124	64 x 134
Folded ladder height [cm]	K	27						
Swing space [cm]	R	156					175	
Distance after ladder unfolding [cm]	C	120					135	
Hatch retraction after opening [cm]	P	4						
Box height [cm]		14						

LADDER PARAMETERS

Tread length [cm]	E	34						
Tread width [cm]		8						
Distance between treads [cm]		25						
Tread thickness [cm]		2						

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER DIMENSIONS

Commercial sizes [cm]		60x120	70x120	70x130	70x140	60x130	70x130	70x140
Room height [cm]	H	280			305			
Codes		865701	865711	865712	865713	865751	865753	865754

Ladders are available only in sizes shown above.

WOODEN SECTION LOFT LADDERS

NEW!**LWL**
EXTRA**4** CLASS*
EN12207STANDARD
EN 14975**U=0.74**
W/m²K

LWL Extra wooden loft ladders in new design with **increased insulation parameters**.
LWL Extra for **increased security** and **comfort of use** has been equipped with an **additional handrail** mounted on the middle folding section and **unloading mechanism** that supports folding and unfolding the ladder.

double system of „seals“ guarantees perfect tightness

Unloading mechanism facilitates folding and unfolding the ladder.

Additional handrail ensures safety and comfort of use.

The hinge controls hatch movement and whilst opening, automatically moves away from the ladder providing added stability and ease of use.

Light hatch weight and method of 'click fixing' makes installation very simple.

Energy-efficient, 5.6cm thick hatch equipped with lock perfectly prevents heat loss.

* manufacturer's internal research



stile ends



easy installation



white hatch



non-slip treads set flush with ladder strings



two seals



ladder unloading mechanism



two handrails




possibility of installing additional accessories pages 54-59

Technical specification:
permissible load 160 kg
loft ladder heat transmission coefficient U=0.74 W/m²K
insulation thickness 5cm
hatch thickness 5.6

fully assembled,
and ready for quick
installation in the ceiling

**3 years**
WARRANTY

LWL EXTRA LADDER DIAGRAM

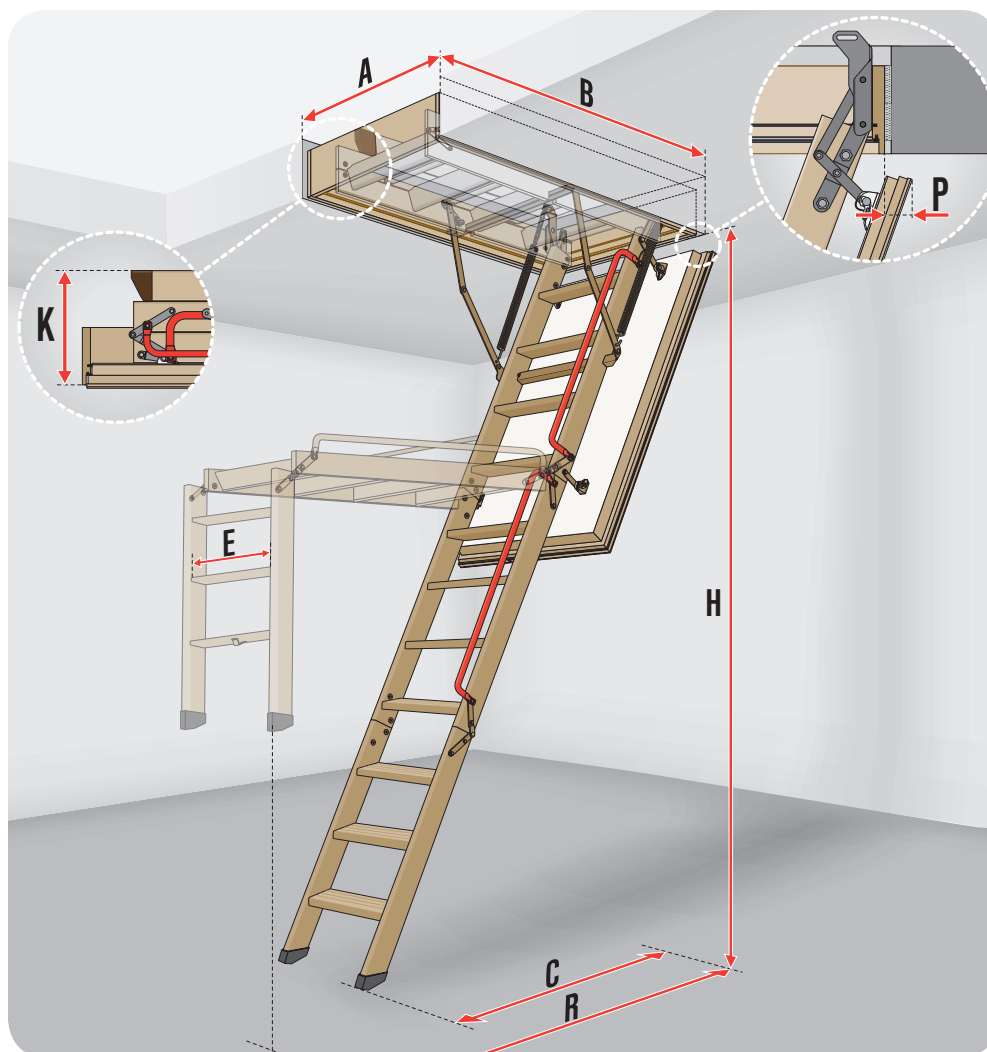

LWL EXTRA LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Maximum room height [cm]	H	280				305		
Minimum room height [cm]*	H _{min.}	260				280		
Box external dimensions [cm]		58x118.4	68x118.4	68x128.4	68x138.4	58x128.4	68x128.4	68x138.4
Internal box dimensions [cm]		54x114	64x114	64x124	64x134	54x124	64x124	64x134
Folded ladder height [cm]	K	30						
Hatch retraction after opening [cm]	R	156				175		
Distance after ladder unfolding [cm]	C	120				135		
Box height [cm]		14						
Hatch retraction after opening [cm]		6						

LADDER PARAMETERS

Tread length [cm]	E	30	34	30	34
Tread width [cm]		8			
Distance between treads [cm]		25			
Tread thickness [cm]		2			

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

Commercial sizes [cm]		60x120	70x120	70x130	70x140	60x130	70x130	70x140
Room height [cm]	H	280				305		
Code		867901	867911	867912	867913	867951	867953	867954

Ladders are available only in sizes shown above.

WOODEN
LOFT LADDERS



WOODEN SECTION LOFT LADDERS

LTK
ENERGY

4 CLASS
EN12207

STANDARD
EN
14975

U=0.68
W/m²K

The **LTK Energy** is highly energy efficient new generation loft ladder intended for energy-efficient buildings. They guarantee a high level of comfort, excellent thermal insulation parameters and the highest Class 4 tightness.



Double system of seals guarantees perfect tightness.



CLICK

Light hatch weight and method of 'click fixing' makes installation very simple.



Short distance between the top tread and attic floor.



Highly energy-efficient, 6.6cm thick hatch prevents heat loss, making significant saving on energy bills.



stile ends (only in 3-section version)



white hatch



non-slip treads set flush with ladder strings



two seals



easy installation



handrail



possibility of installing additional accessories pages 54-59


Technical specification:
maximum load of 160 kg
loft ladder heat transmission coefficient $U = 0.68 \text{ W/m}^2\text{K}$
insulation thickness 6 cm
hatch thickness 6.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LTK ENERGY LADDER DIAGRAM

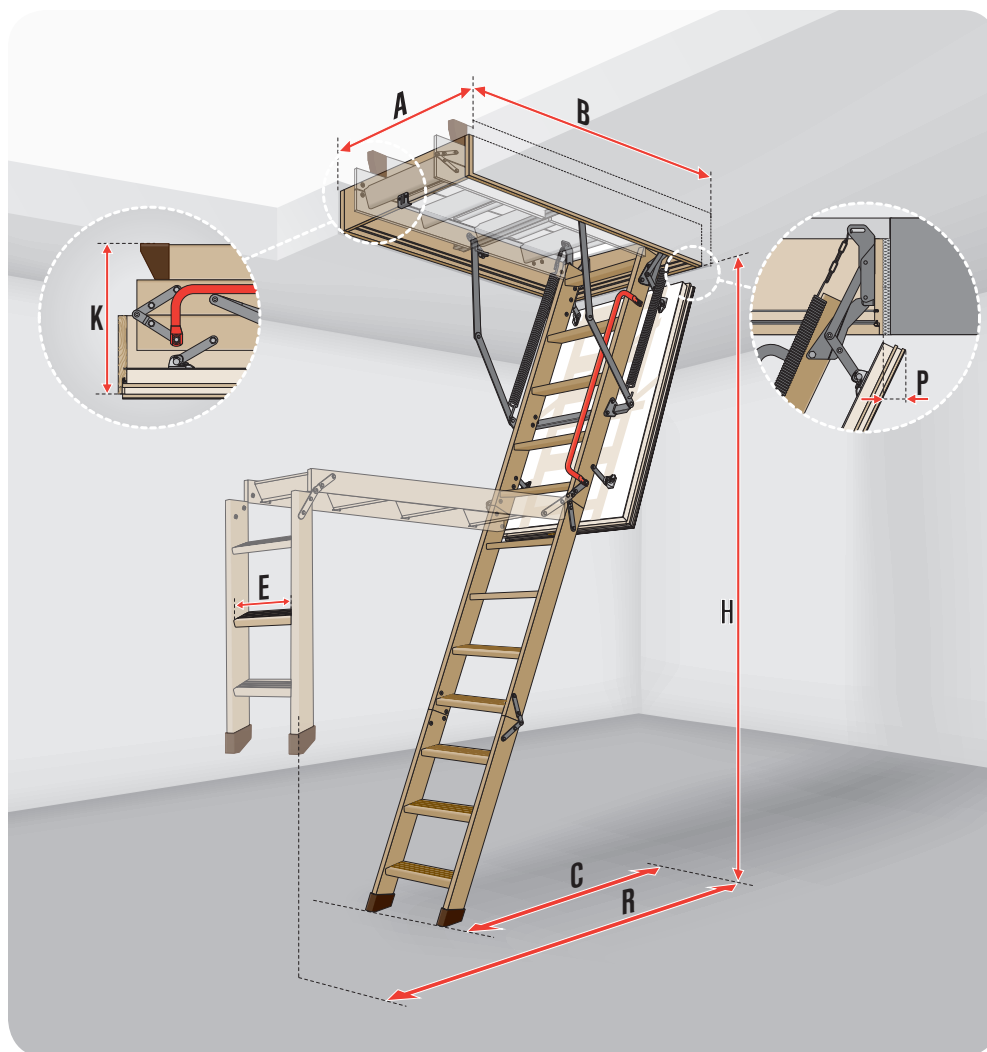

LTK ENERGY LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	A x B	55x100	60x100	70x100	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Maximum room height [cm]	H	280							305		
Minimum room height [cm]*	H _{min.}	253			235				243		
Box external dimensions [cm]		53x98.4	58x98.4	68x98.4	58 x 118.4	68 x 118.4	68 x 128.4	68 x 138.4	58 x 128.4	68 x 128.4	68 x 138.4
Internal box dimensions [cm]		49x94	54x94	64x94	54 x 114	64 x 114	64 x 124	64 x 134	54 x 124	64 x 124	64 x 134
Folded ladder height [cm]	K	42			35						
Swing space [cm]	R	136			164				178		
Distance after ladder unfolding [cm]	C	123			129				139		
Hatch retraction after opening [cm]	P	3									
Box height [cm]		18									
Number of segments		4			3						

LADDER PARAMETERS

Tread length [cm]	E	30	34
Tread width [cm]			8
Distance between treads [cm]			25
Tread thickness [cm]			2

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		55x100	60x100	70x100	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Room height [cm]	H	280							305		
Code		864720	864706	864716	864701	864711	864712	864713	864751	864753	864754

Ladders are available only in sizes shown above.

WOODEN
LOFT LADDERS



WOODEN SECTION LOFT LADDERS

LWT

4 CLASS
EN12207

STANDARD
**EN
14975**

U=0.51
W/m²K



The highly efficient **LWT** loft ladder is recommended for use in energy-efficient buildings. Its excellent level of insulation significantly reduces heat loss and energy bills.

Triple system of seals guarantees perfect tightness.

CLICK

Light hatch weight and method of 'click fixing' makes installation very simple.

Short distance between the top tread and attic floor.

Its special 8cm thick hatch is filled with polystyrene insulation to provide an excellent barrier and reduce heat loss.



stile ends (only in 3-section version)



white hatch



non-slip treads set flush with ladder strings



three seals



easy installation



handrail



possibility of installing additional accessories pages 54-59


Technical specification:
permissible load of 160 kg
loft ladder heat transmission coefficient $U = 0.51 \text{ W/m}^2\text{K}$
insulation thickness 7.4 cm
hatch thickness 8 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LWT LOFT LADDER DIAGRAM

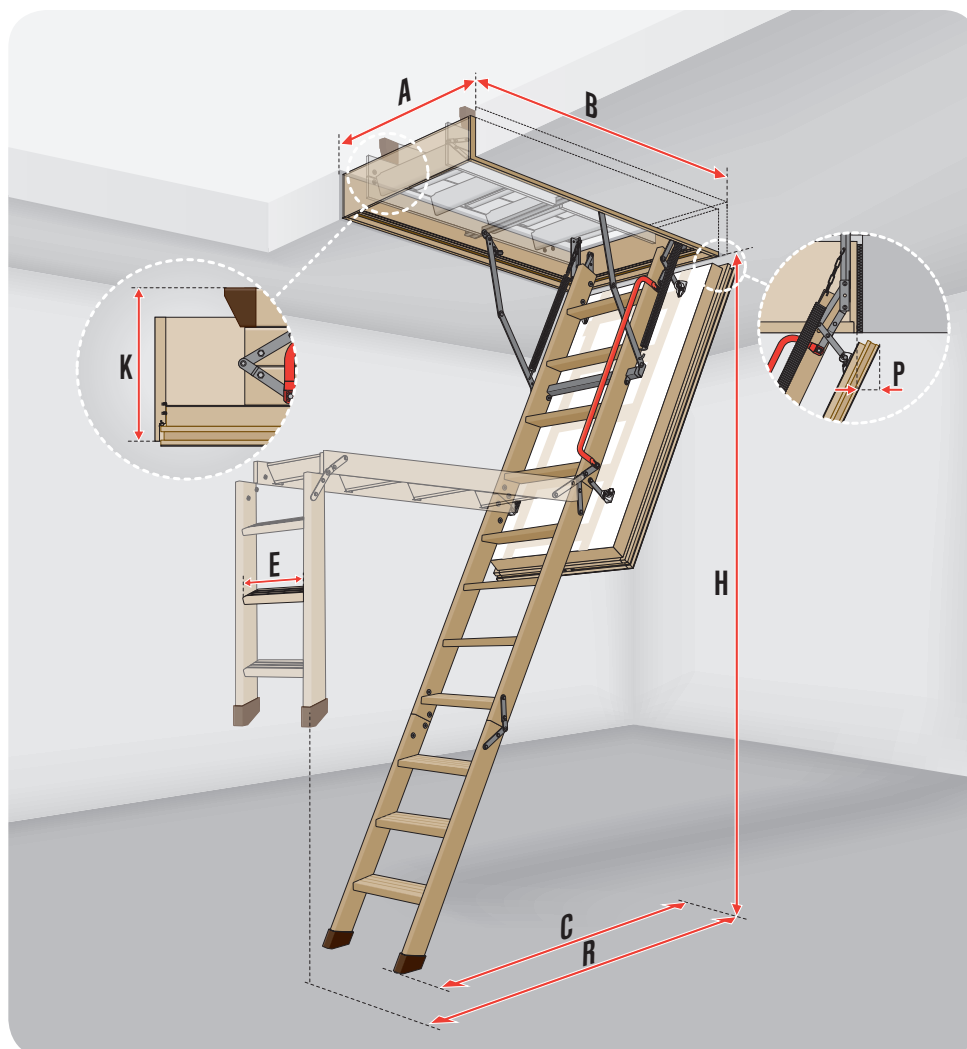

LWT LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	55x100	60x100	70x100	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Maximum room height [cm]	H	280								305	
Minimum room height [cm]*	H _{min.}	253			234				242		
Box external dimensions [cm]		53 x 98.4	58 x 98.4	68 x 98.4	58 x 118.4	68 x 118.4	68 x 128.4	68 x 138.4	58 x 128.4	68 x 128.4	68 x 138.4
Internal box dimensions [cm]		49x94	54x94	64x94	54 x 114	64 x 114	64 x 124	64 x 134	54 x 124	64 x 124	64 x 134
Folded ladder height [cm]	K	43.5			36				36		
Swing space [cm]	R	136			164				178		
Distance after ladder unfolding [cm]	C	123			130				137		
Hatch retraction after opening [cm]	P	4.5									
Box height [cm]		22									
Number of segments		4			3						

LADDER PARAMETERS

Tread length [cm]	E	30	34
Tread width [cm]			8
Distance between treads [cm]			25
Tread thickness [cm]			2

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

Commercial sizes [cm]		55x100	60x100	70x100	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Room height [cm]	H	280							305		
Index		863120	863106	863116	863101	863111	863112	863113	863151	863153	863154

Ladders are available only in sizes shown above.

WOODEN
LOFT LADDERS



LOFT LADDERS WITH WOODEN FOLDING SECTION

NEW!

LWT
PASSIVE
HOUSE

4 CLASS
EN12207

STANDARD
EN
14975

U=0.51
W/m²K



The **LWT Passive House** loft ladder is a technically complex design specifically developed for the demands of such energy-efficient construction standards. It is installed with a kit which connects the ladder to the ceiling to guarantee a perfect seal and insulation without thermal bridges. It comes with Passive House certification.



stile ends



PASSIVE HOUSE
Insulation kit



white hatch



non-slip treads set flush
with ladder strings



three seals



easy installation



handrail



possibility of installing
additional accessories
pages 54-59


Technical specification:
permissible load of 160 kg
loft ladder heat transmission coefficient $U = 0.51 \text{ W/m}^2\text{K}$
insulation thickness 7.4 cm
hatch thickness 8 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LWT PASSIVE HOUSE HOUSE LOFT LADDER DIAGRAM

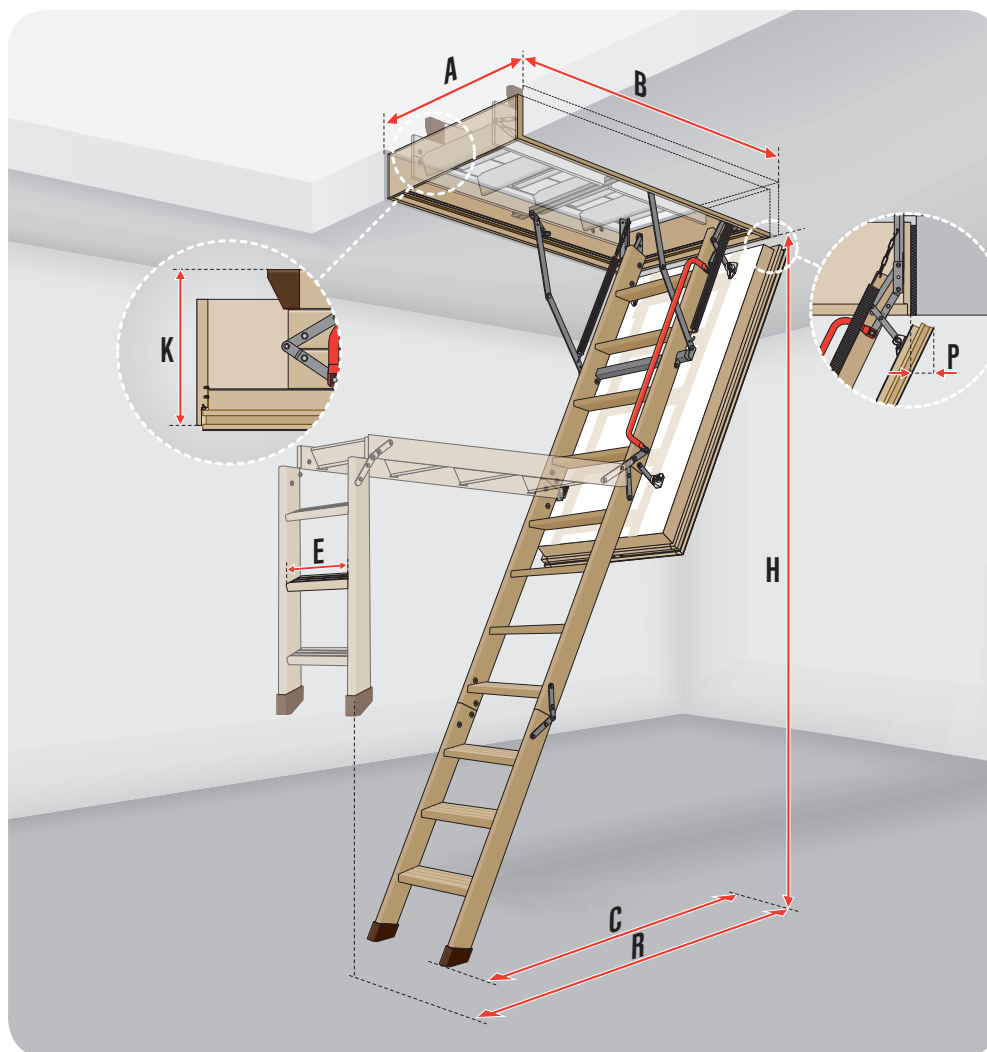

LWT PASSIVE HOUSE LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	62x122	72x122	72x132	72x142	62x132	72x132	72x142
Maximum room height [cm]	H	280				305		
Minimum room height [cm]*	H _{min.}	234				242		
Box external dimensions [cm]		58x118.4	68x118.4	68x128.4	68x138.4	58x128.4	68x128.4	68x138.4
Internal box dimensions [cm]		54x114	64x114	64x124	64x134	54x124	64x124	64x134
Folded ladder height [cm]	K	36						
Swing space [cm]	R	164				178		
Distance after ladder unfolding [cm]	C	127				137		
Hatch retraction after opening [cm]	P	4.5						
Box height [cm]		22						

LADDER PARAMETERS

Tread length [cm]	E	34						
Tread width [cm]		8						
Distance between treads [cm]		25						
Tread thickness [cm]		2						

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		62x122	72x122	72x132	72x142	62x132	72x132	72x142
Room height [cm]	H	280				305		
Code		8665AE	8665AF	8665AG	8665AH	8665AJ	8665AK	8665AL

Ladders are available only in sizes shown above.

WOODEN
LOFT LADDERS



LOFT LADDERS WITH WOODEN FOLDING SECTION

LWF 45
FIRE-RESISTANT

EN 13501-2
EI₁45

STANDARD
EN 14975

U=0.6*
W/m²K

The **LWF 45**, a new generation of fire resistant loft ladders which perfectly combines a **high level of fire protection** with comfortable and safe access to the loft. Special hatch design and materials used provide a **45-minute** protection against fire penetration from the space where the loft ladder was installed. (**EI₁45/ EI₂45**).

Triple system of seals guarantees perfect airtightness.

Short distance between the top tread and loft floor.

The hinge controls hatch movement, and as its opened, moves the hatch away from the ladder's treads. Resulting in increased space and easy operation.

Insulated and finished in white on both sides, the hatch is also equipped with an expandable seal. When this seal is exposed to high temperatures, it expands and prevents fire from breaching the hatch.

* manufacturer's internal research



stile ends (only in 3-section version)



handrail



fire resistant hatch on one side



non-slip treads set flush with ladder strings



three seals



possibility of installing additional accessories pages 54-59


Technical specification:
maximum load of 160 kg
loft ladder heat transmission coefficient U = 0.6 W/m²K
Fire resistance class EI₁/EI₂=45minutes insulation thickness 7.4 cm
hatch thickness 8 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LWF 45 LOFT LADDER DIAGRAM

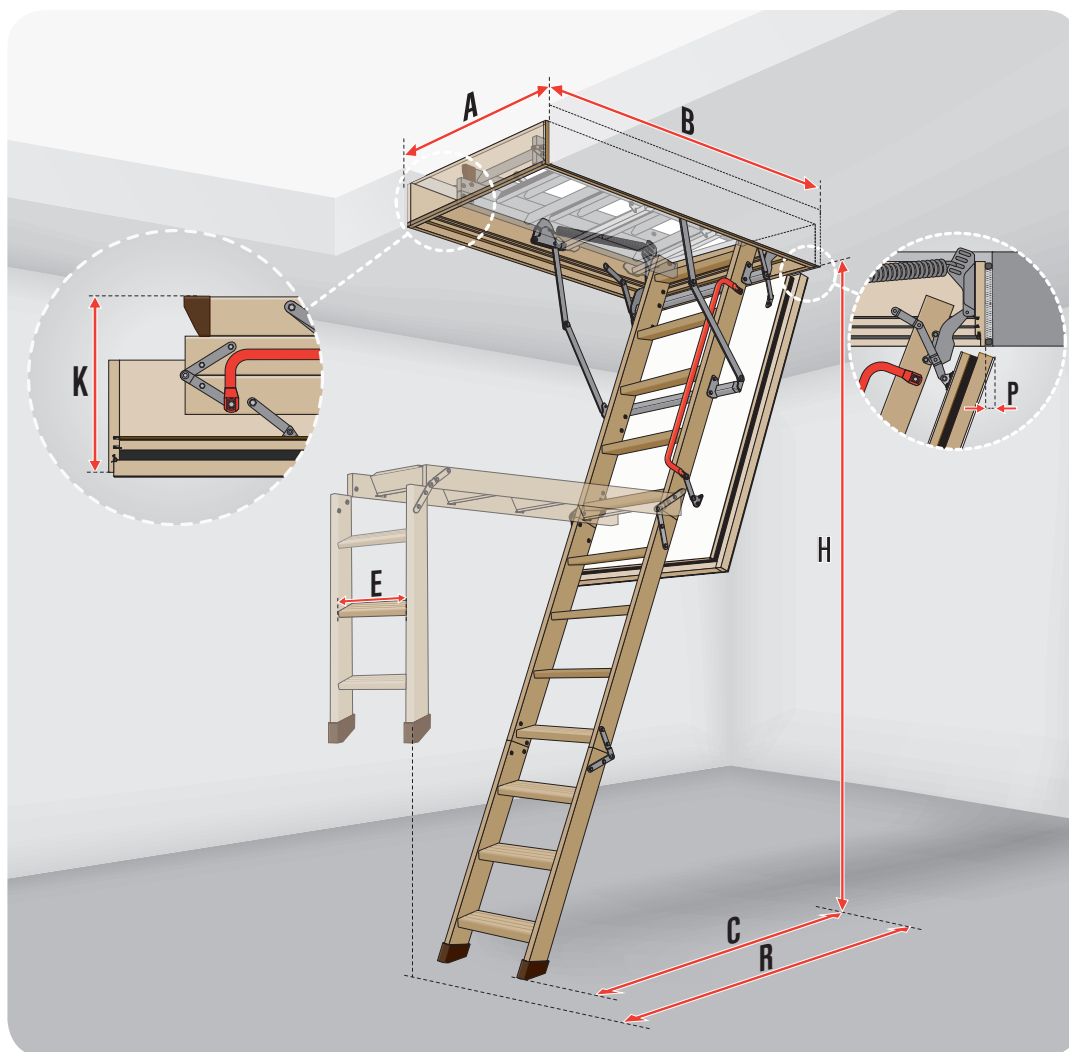

LWF 45 LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	55 x 100	60 x 100	70 x 100	60x120	70x120	70x130	70x140	86x130	70x130	70x140	86x130
Maximum room height [cm]	H	280									305	
Minimum room height [cm]*	H _{min.}	253			234					242		
Box external dimensions [cm]		53 x 98	58 x 98	68 x 98	58 x 118	68 x 118	68 x 128	68x138	84x128	68x128	68 x 138	84 x 128
Internal box dimensions [cm]		49 x 94	54 x 94	64 x 94	54 x 114	64 x 114	64 x 124	64 x 134	80 x 124	64 x 124	64 x 134	80 x 124
Folded ladder height [cm]	K	44			37							
Swing space [cm]	R	138			164						178	
Distance after ladder unfolding [cm]	C	126			129						139	
Hatch retraction after opening [cm]	P	3										
Box height [cm]		22										
Number of segments		4			3							

LADDER PARAMETERS

Tread length [cm]	E	30	34
Tread width [cm]			8
Distance between treads [cm]			25
Tread thickness [cm]			2

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

Commercial sizes [cm]		55 x 100	60 x 100	70 x 100	60x120	70x120	70x130	70x140	86x130	70x130	70x140	86x130
Room height [cm]	H	280								305		
Indeks		864620	864606	864616	864601	864611	864612	864613	864696	864653	864654	864697

Ladders are available only in sizes shown above.

WOODEN
LOFT LADDERS



SLIDING SECTION LOFT LADDERS

LDK

STANDARD
**EN
14975**

U=1.1
W/m²K

➤ The **LDK** loft ladder is a 2-section, sliding loft ladder. It is similar in style to folding section ladders, the main difference being that the bottom section simply slides up into the loft, eliminating the need for swing space.



The sliding ladder mechanism has a longer lower section which gives it stability.



white hatch



peripheral seal



handrail



non-slip treads with
additional depth



possibility of installing
additional accessories
pages 54-59



Technical specification:
maximum load of 160 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LDK LOFT LADDER DIAGRAM

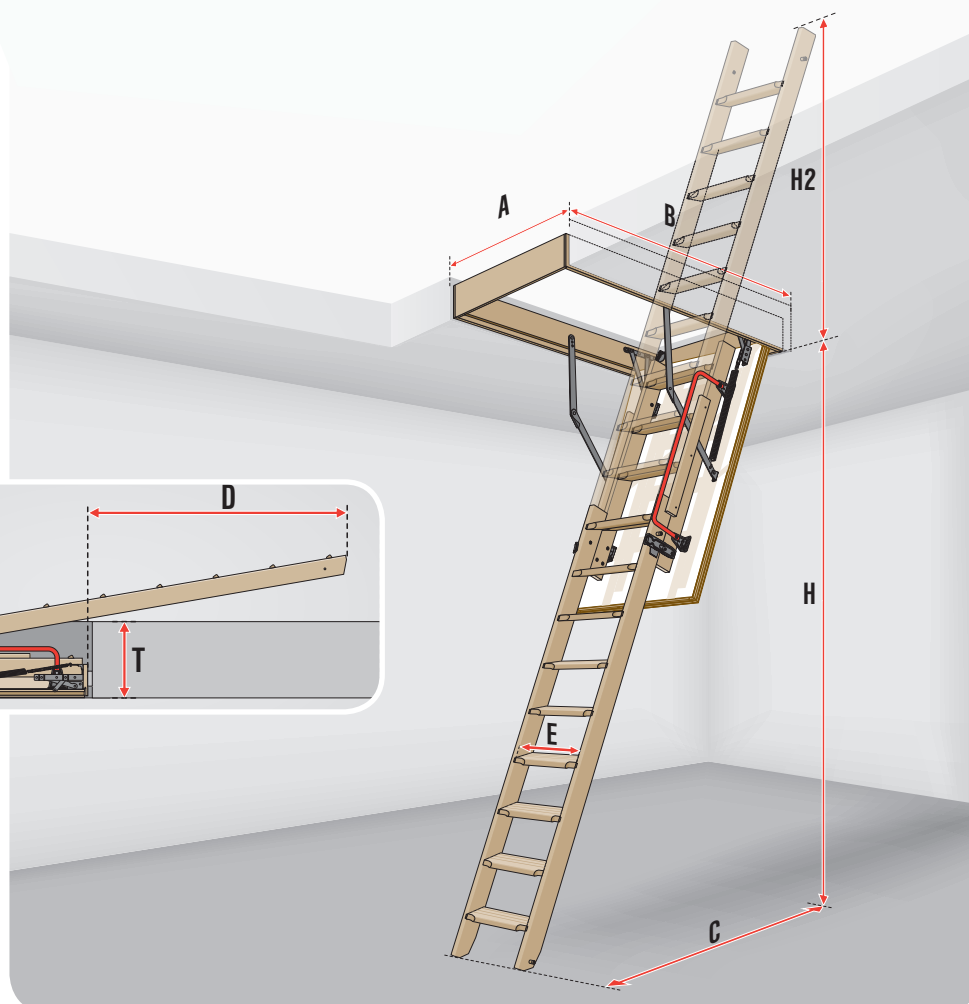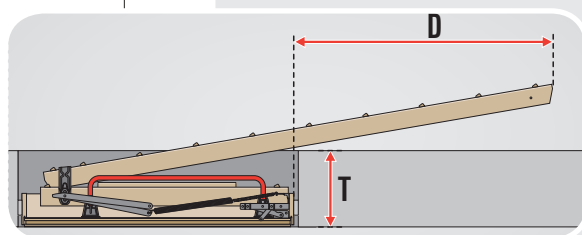

LDK LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	60x120	70x120	70x130	70x140
Sliding section LDS		LDS-9				LDS-10			
Maximum room height [cm]	H	280				305			
Minimum room height [cm]*	H _{min.}	200							
Box external dimensions [cm]		58x118.4	68x118.4	68x128.4	68x138.4	58x118.4	68x118.4	68x128.4	68x138.4
Internal dimensions of the box [cm]		54x114	64x114	64x124	64x134	54x114	64x114	64x124	64x134
Distance of drop [cm]	C	130				140			
Max height of the loft required [cm]	H2	130				155			
Max length of the loft required with hatch door closed	D	129				155			
Max thickness of the ceiling [cm]	T	35							
Box height [cm]		14							

LADDER PARAMETERS

Tread length [cm]	E	34
Tread width [cm]		8
Distance between treads [cm]		25
Tread thickness [cm]		2

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x120	70x120	70x130	70x140	60x120	70x120	70x130	70x140
Room height [cm]	H	280				305			
Code LDK*		861001	861011	861012	861013	861001	861011	861012	861013
Code LDS*		861101	861101	861101	861101	861102	861102	861102	861102

* The LDK complete ladder consists of the top element and sliding section LDS, packed separately.

NON-STANDARD LOFT LADDER SIZES

Where installation of a standard FAKRO loft ladder is not possible, bespoke timber folding sections of the LWK KOMFORT can be made.

BOX

The loft ladder box is made of wood and has a peripheral seal placed within a milled recess. Once the hatch is closed, this seal ensures full airtightness is provided and once installed the box's special design enables quick and easy fitting of either a lining or architrave.

HARDWARE

The spring catch provides added rigidity to the box, prevents distortion and ensures that the ladder will continue to be operated trouble-free. The hinges joining each section of the ladder also add strength to connections as they move.

TREADS

Grooves which are cut into the tread surface protect the user from accidental slipping while using the ladder.

STILE ENDS

Stile ends (for 3-section loft ladders only) made of PVC protect the floor surface from scratching and add to overall stability.

HATCH OPENING MECHANISM

Operation of the loft ladder is significantly improved because of Fakro's unique unloading mechanism. Once unlocked, the hatch opens slowly without any potential danger to the user. Once fully opened, this mechanism will also hold the hatch in position, preventing it from slamming shut.

HATCH

The loft ladder hatch is made of wood and can be either insulated or fire-resistant. The insulation protects against heat loss while fire-resistant material protects against heat build-up caused by spread of flame. The external hatch surface is smooth with no visible fixing points to detract from the visual style of any interior design.


LADDER

FAKRO loft ladders are predominantly of three sections, though some have four. These are moved away from the hatch in order to create more space for the feet. The special ladder structure and materials used ensure the highest standard of durability.

When ordering the **LWK Komfort** loft ladder in non-standard sizes the actual dimensions of the ceiling opening ('A' and 'B') and the room height 'H' have to be provided.

The actual size of the loft ladder box is reduced (for installation reasons) by 2 cm in width and 1.6 cm in length, e.g. for the opening dimensions 54 x 94cm, those of the ladder would be 52 x 92.4cm. When ordering please take into account the swing space needed when unfolding (swing space 'R'), the distance once the ladder is unfolded (distance 'C') and hatch retraction after it is opened (distance 'P').

LWK Komfort loft ladders are equipped with a hatch which is finished in white on both sides (three section ladders only), and, with the exception of ladders for a 54cm hatch width, a handrail. The height of the loft ladder box is 14cm though to provide a neat finish with deeper ceilings an LXN box extension can be installed (see page 56).

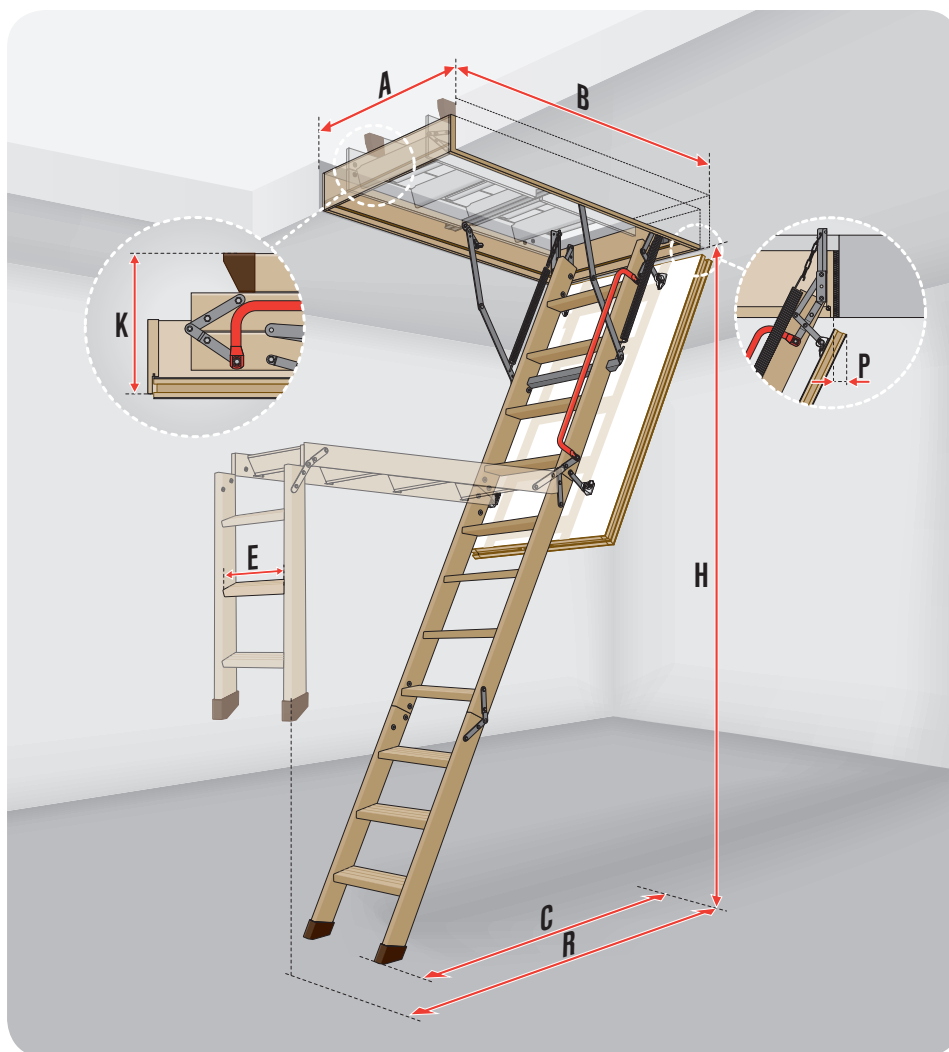

LOFT LADDER COMMERCIAL SIZES

Ceiling opening width [cm]	Ceiling opening length [cm]	Room height [cm]	Swing space (measured from the rear edge of the box) [cm]	Distance after ladder unfolding (measured from the rear edge of the box) [cm]	Hatch retraction after opening [cm]	Number of segments after opening
A	B	H	R	C	P	
54 – 86	94 – 140	200 – 280	115-155	89-120	4	3 or 4 segments*
	120 – 129	280 – 305	140	110-119	4	4 segments
	130 – 140	280 – 305	155-175	120-135	4	3 segments
	140	305 – 335	175-184	135-146	4	3 segments

* - Number of ladder's segments depends on the opening length configuration and room height.

TREAD LENGTH:

3-segment ladder

Ceiling opening width A [cm]	54 ≤ A < 58	58 ≤ A
Tread length E [cm]	30	34

4-segment ladder

Ceiling opening width A [cm]	54 ≤ A < 56	56 ≤ A < 60	60 ≤ A
Tread length E [cm]	28	30	34

METAL SECTION
LOFT LADDERS



**SECTION
LOFT LADDERS**



► BOX

The ladder box can be of wood, metal or a combination of a wooden box / metal frame. It has been designed to enable architrave to be installed with ease if the ready-fitted option is not chosen. Peripheral single or double seals provide a good standard of airtightness.

► HATCH UNFOLDING MECHANISM

The hatch opening mechanism enables it to be fully or partly open positions to ensure folding and unfolding are done in safety. LML and LMF loft ladders also have a hidden mechanism in the handrail which in conjunction with that of the hatch opening enables them to be opened or closed with a single rod.

► HARDWARE

The patented corner hinge design adds rigidity to the box and prevents distortion. This ensures that the ladder will continue to be operated trouble-free.

► HATCH

The loft ladder hatch is made of wood or metal and can be either insulated or fire-resistant. The insulation protects against heat loss while fire-resistant material protects against heat build-up caused by spread of flame. The external hatch surface is smooth to blend effectively with the visual style of any interior design.

► TREAD

Circular embossing of the tread surface prevents slipping while the width of treads (8 or 13cm) enables them to be used safely and with ease.

► STILE ENDS

Made from plastic, these protect the floor from scratches and in addition add to the overall ladder stability.

► LADDER

The special design of the metal ladder and a double connection of the ladder hinges guarantee high ladder strength. Ladder elements are powder-coated with hard wearing lacquer in grey RAL 7022 or silver RAL 9006. Some metal ladders have the final two treads left loose and with telescopic stile ends this enables adjustments of the ladder length to be made without the need for cutting.

METAL
LOFT LADDERS



METAL FOLDING SECTION LOFT LADDERS

LMS
SMART

STANDARD
**EN
14975**

U=1.1
W/m²K

The **LMS** is a 3-section loft ladder in which the hatch and box are made of pine. The metal ladder is powder-coated in RAL 7022 while the insulated hatch is finished in beige.

The use of metal ladder with special hinge structure guarantees high durability -permissible loading 200kg.



stile ends



beige hatch



peripheral seal



non-slip treads



possibility of installing additional accessories pages 54-59


Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LMS LOFT LADDER DIAGRAM

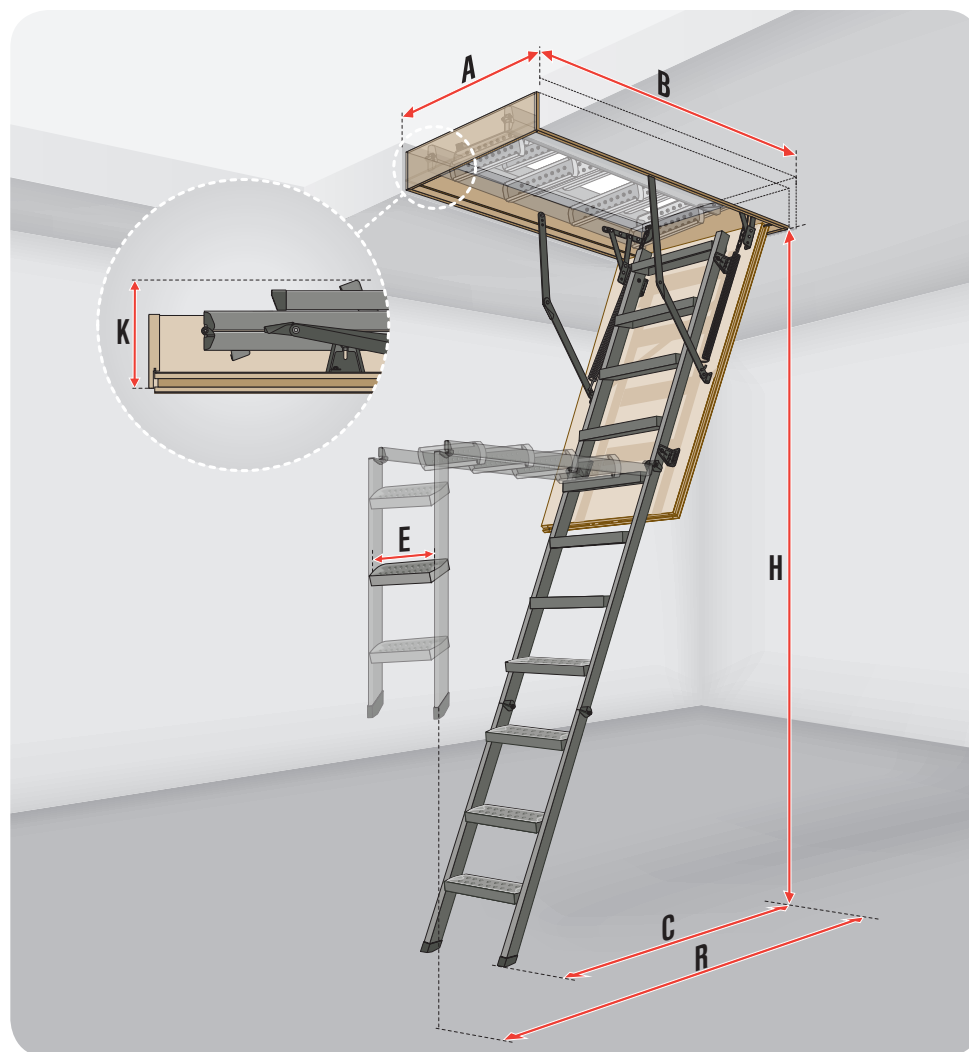

LMS LOFT LADDER DIMENSIONS



Ceiling opening dimensions [cm]	AxB	60x120	70x120
Maximum room height [cm]	H	280	
Minimum room height [cm]*	H_{min.}	220	
Box external dimensions [cm]		58 x 118.4	68 x 118.4
Internal box dimensions [cm]		54 x 114	64 x 114
Folded ladder height [cm]	K	25.5	
Swing space [cm]	R	157	
Distance after ladder unfolding [cm]	C	118.5	
Box height [cm]		14	

LADDER PARAMETERS

Tread length [cm]	E	34
Tread width [cm]		8
Distance between treads [cm]		25

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x120	70x120
			
Room height [cm]	H	280	
Code		861201	861211

Ladders are available only in sizes shown above.

METAL
LOFT LADDERS



METAL FOLDING SECTION LOFT LADDERS

LMK
KOMFORT

STANDARD
**EN
14975**

U=1.1
W/m²K

Unlike the LMS the **LMK** loft ladder has a white hatch and red handrail. The handrail is fixed to the ladder brackets, making its use much easier.



White insulated hatch
and handrail



stile ends



handrail



white hatch



non-slip treads



peripheral seal



possibility of installing
additional accessories
pages 54-59


Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LMK LOFT LADDER DIAGRAM

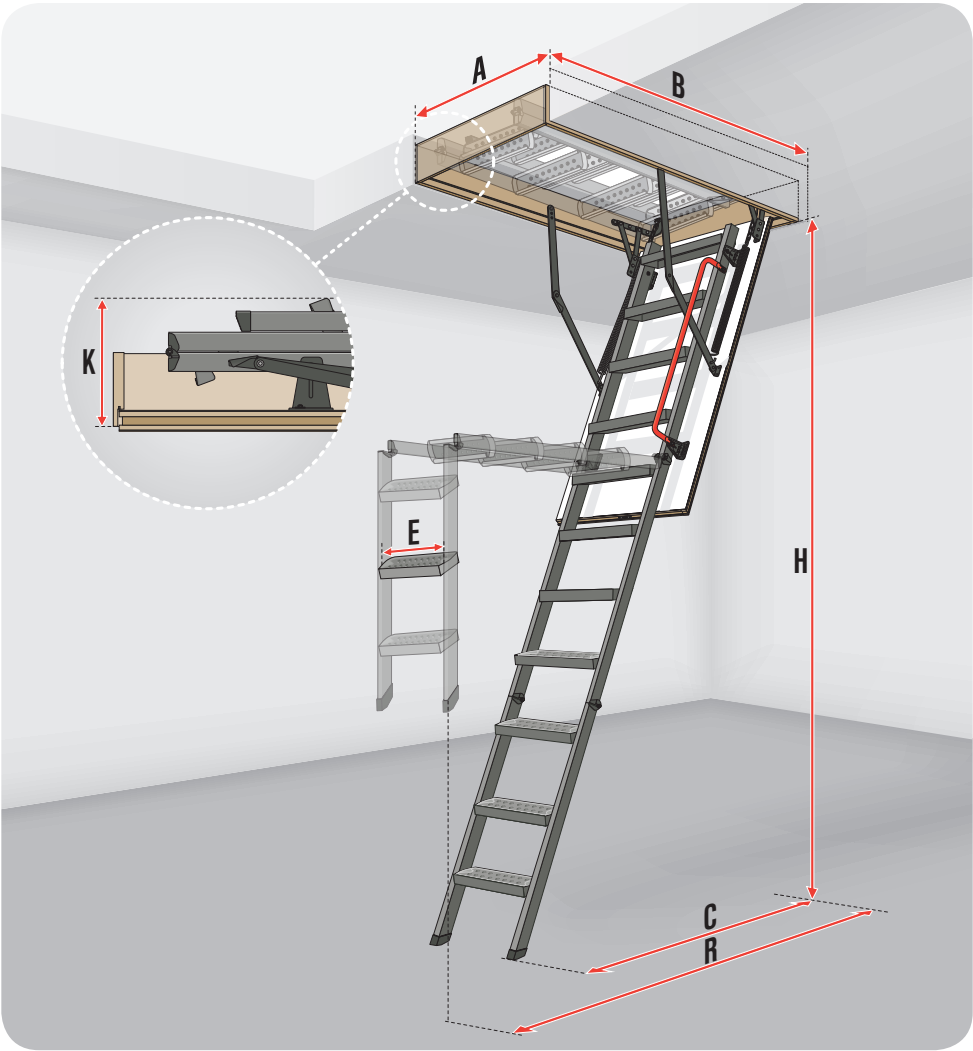

LMK LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	60x130	70x130	70x140
Maximum room height [cm]	H	280				305		
Minimum room height [cm]*	H _{min.}	220				245		
Box external dimensions [cm]		58x118.4	68x118.4	68x128.4	68x138.4	68x128.4	68x128.4	68x138.4
Internal box dimensions [cm]		54x114	64x114	64x124	64x134	54x124	64x124	64x134
Folded ladder height [cm]	K	25.5						
Swing space [cm]	R	157				175		
Distance after ladder unfolding [cm]	C	118.5				127		
Box height [cm]		14						

LADDER PARAMETERS

Tread length [cm]	E	34						
Tread width [cm]		8						
Distance between treads [cm]		25						

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x120	70x120	70x130	70x140	60x130	70x130	70x140
Room height [cm]	H	280				305		
Code		861401	861411	861412	861413	861451	861453	861454

Ladders are available only in sizes shown above.

METAL
LOFT LADDERS




METAL FOLDING SECTION LOFT LADDERS

LML
LUX

STANDARD
EN 14975

U=1.1
W/m²K

The **LML** folding section metal loft ladder has been designed to provide the highest standard of ease and convenience while offering simple assembly and height adjustment.



Steel frame integrated with a wooden box, metal architrave lining and quick fit brackets.



Mechanism hidden within the rail aids folding and unfolding of the ladder.



Additional tread shortens distance between top tread and loft floor.



Telescopic stile ends enable quick adjustment of ladder length to suit ceiling height.



telescopic stile ends



ladder unloading mechanism built in handrail



white hatch



system of quick installation in the ceiling



finishing lining slats



non-slip treads, 13cm in width



peripheral seal



possibility of installing additional accessories pages 54-59


Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LML LUX LOFT LADDER DIAGRAM

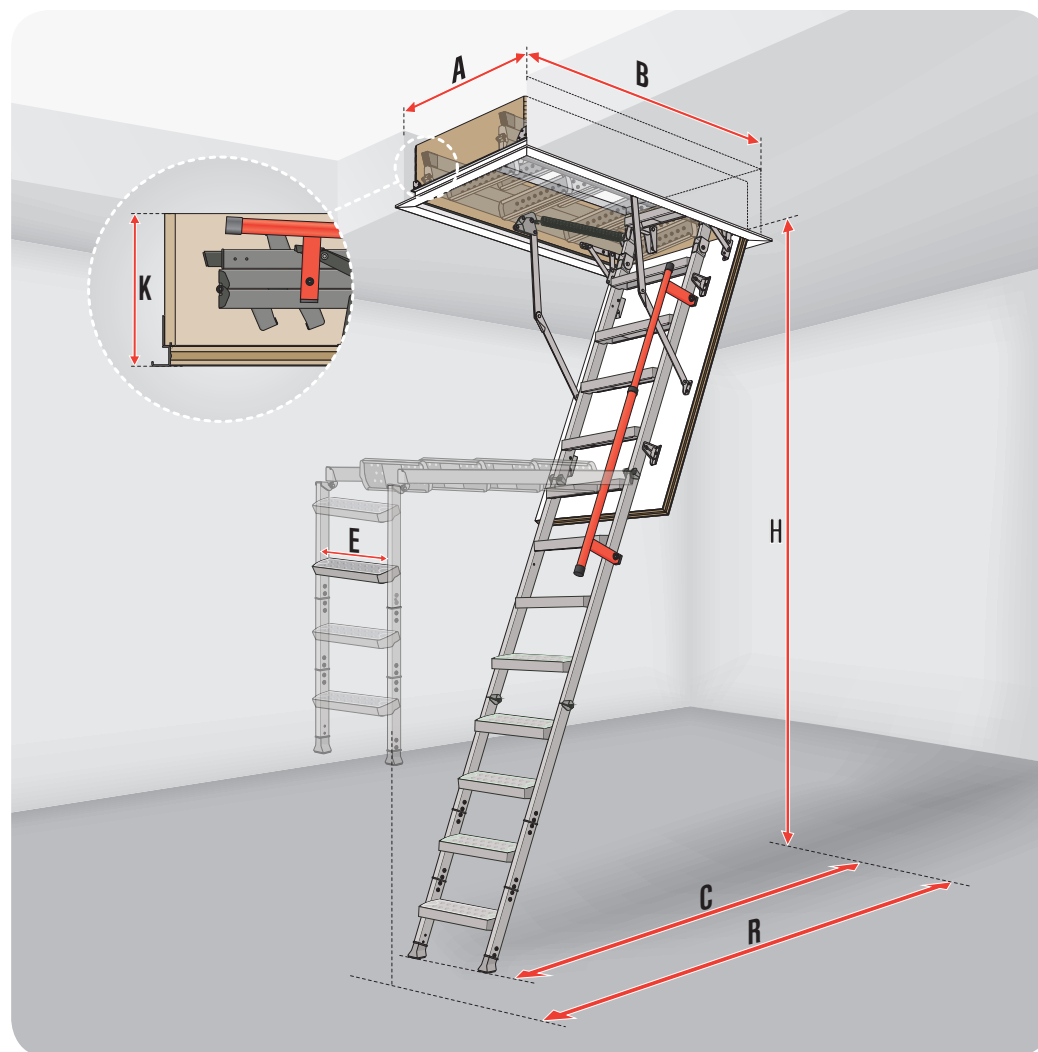

LML LUX LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	86x130	92x130	60x130	70x130	70x140	86x130	92x130
Maximum room height [cm]	H	280						305				
Minimum room height [cm]*	H _{min.}	233						256				
Box external dimensions [cm]		59.6x118.6	68.6x118.6	68.6x128.6	68.6x138.6	84.6x128.6	90.6x128.6	59.6x128.6	68.6x128.6	68.6x138.6	84.6x128.6	90.6x128.6
Box external dimensions with architrave linings [cm]		63.6x122.6	72.6x122.6	72.6x132.6	72.6x142.6	88.6x132.6	94.6x132.6	63.6x132.6	72.6x132.6	72.6x142.6	88.6x132.6	94.6x132.6
Internal box dimensions [cm]		55x114	64x114	64x124	64x134	80x124	86x124	55x124	64x124	64x134	80x124	86x124
Folded ladder height [cm]	K	31.5										
Swing space [cm]	R	167						178				
Distance after ladder unfolding [cm]	C	120						130				
Box height [cm]		31.5										

LADDER PARAMETERS

Tread length [cm]	E	35
Tread width [cm]		13
Distance between treads [cm]		25

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x120	70x120	70x130	70x140	86x130	92x130	60x130	70x130	70x140	86x130	92x130
Room height [cm]	H	280						305				
Code		862401	862411	862412	862413	862496	862498	862451	862453	862454	862497	862499

Ladders are available only in sizes shown above.

METAL LOFT
LADDERS



METAL FOLDING SECTION LOFT LADDERS

LMP

STANDARD
**EN
14975**

U=1.1
W/m²K

The **LMP** new generation loft ladder, allows access to attic space, even in **very high ceiling rooms** (from 300 to 366cm). The unloading system used in ladder allows for convenient operation while maintaining the maximum comfort and safety of use.

White on both sides, 3.6 cm thick, insulated hatch equipped with a latch

Added safety, thanks to lock which prevents against unintentional folding.

Short distance between the last tread and attic floor enhances the comfort of use.

Ladders intended for installation in high ceiling rooms.

Insulated and finished in white on both sides, the hatch is also equipped with an expandable seal. When this seal is exposed to high temperatures, it expands and prevents fire from breaching the hatch.



stile ends



ladder unloading mechanism built in handrail



white hatch



non-slip treads



peripheral seal



possibility of installing additional accessories pages 54-59



for high rooms

Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LMP LOFT LADDER DIAGRAM



LMP LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x144	70x144	86x144
Maximum room height [cm]	H	366		
Minimum room height [cm]*	H _{min.}	300		
Box external dimensions [cm]	WxL	58x142.2	68x142.2	84x142.2
Internal box dimensions [cm]	MxN	54x138.2	64x138.2	80x138.2
Folded ladder height [cm]	K	32		
Swing space [cm]	R	196		
Distance after ladder unfolding [cm]	C	145		
Box height [cm]		18		

LADDER PARAMETERS

Tread length [cm]	E	34		
Tread width [cm]	S	8		
Distance between treads [cm]	G	24		

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x144	70x144	86x144
Room height [cm]	H	366		
Code		869334	869335	869336

Ladders are available only in sizes shown above.

METAL LOFT
LADDERS

METAL FOLDING SECTION LOFT LADDERS

NEW!

LMF 45
FIRE-RESISTANT

STANDARD
**EN
14975**

EN 13501-2
EI, 45

U=0.6*
W/m²K

➤ **The LMF 45**, a new generation of fire resistant loft ladders with metal ladder which perfectly combines a high level of fire protection with comfortable and safe access to the loft.

Triple system of seals guarantees perfect tightness.

handrail
in loft ladders
in version
358cm

The unloading mechanism built into the handrail supports folding and unfolding the ladder (only in loft ladders in version 358cm).

Short distance between the last tread and attic floor.

The hinge controls hatch movement, and as its opened, moves the hatch away from the ladder's treads. Resulting in increased space and easy operation.

The white on both sides and insulated, the hatch is equipped with expandable seal which under the influence of heat expands and prevents entering the fire to the fire free space.



stile ends



one - sidedly
fire-resistant hatch



seal
x3



handrail
(in loft ladders in
version 280 and 305cm)



ladder unloading
mechanism built in handrail
(in version 358cm in height).



non-slip treads



possibility of installing
additional accessories
pages 54-59



for high rooms

*manufacturer's internal research

Technical specification:
permissible loading of 200 kg
loft ladder heat transmission coefficient $U = 0.6 \text{ W/m}^2\text{K}$ *
Fire resistance class EI₁/EI₂ = 45 minutes
insulation thickness 7.4 cm
hatch thickness 8 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LMF 45 LADDER DIAGRAM



LMF 45 LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	86x130	70x130	70x140	86x130	60x140	70x140	86x140
Maximum room height [cm]	H	280						305			358	
Minimum room height [cm]*	H _{min.}	233						234			300	
Box external dimensions [cm]		58x118	68x118	68x128	68x138	84x128	68x128	68x138	84x128	58x138	68x138	84x138
Box internal dimensions [cm]		54x114	64x114	64x124	64x134	80x124	64x124	64x134	80x124	54x134	64x134	80x134
Folded ladder height [cm]	K	41									39	
Swing space [cm]	R	156						167			194	
Distance after ladder unfolding [cm]	C	125						135			155	
Hatch retraction after opening	P							4				
Box height [cm]								22				

LADDER PARAMETERS

Tread length [cm]	E	34										
Tread width [cm]	S	8										
Distance between treads [cm]	G	25									24	

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x120	70x120	70x130	70x140	86x130	70x130	70x140	86x130	60x140	70x140	86x140
Room height [cm]	H	280					305			358		
Code		866401	866411	866412	866413	866496	866453	866454	866497	8664AA	8664AB	8664AC

Ladders are available only in sizes shown above.

FIRE-RESISTANT LOFT LADDERS

LMF
FIRE-RESISTANT

EN 13501-2
EI₂120

STANDARD
EN 14975

U=0.79*
W/m²K

The design of **LMF** loft ladder complies with stringent fire requirements, whilst providing safe and comfortable access to the loft spaces. The LMF ladder prevents fire from spreading to the upper or lower fire free storey for **120 minutes**.

Integrated with steel frame the quick installation system reduces time required to settle loft ladder in the ceiling.

Short distance between the last tread and attic floor.

The special hatch design and materials used in its production protect for 120 min against the ingress of fire.

Mechanism hidden within the rail aids folding and unfolding of the ladder.

* manufacturer's internal research



telescopic stile ends



ladder unloading mechanism built in handrail



fire-resistant hatch on both sides



system of quick installation in the ceiling



architrave lining



non-slip treads, 13 cm in width



seal



possibility of installing additional accessories pages 54-59


Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 0.79 \text{ W/m}^2\text{K}$
fire-resistance EI₂=120 minutes
insulation thickness 8 cm
hatch thickness 8.2 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LMF LOFT LADDER DIAGRAM

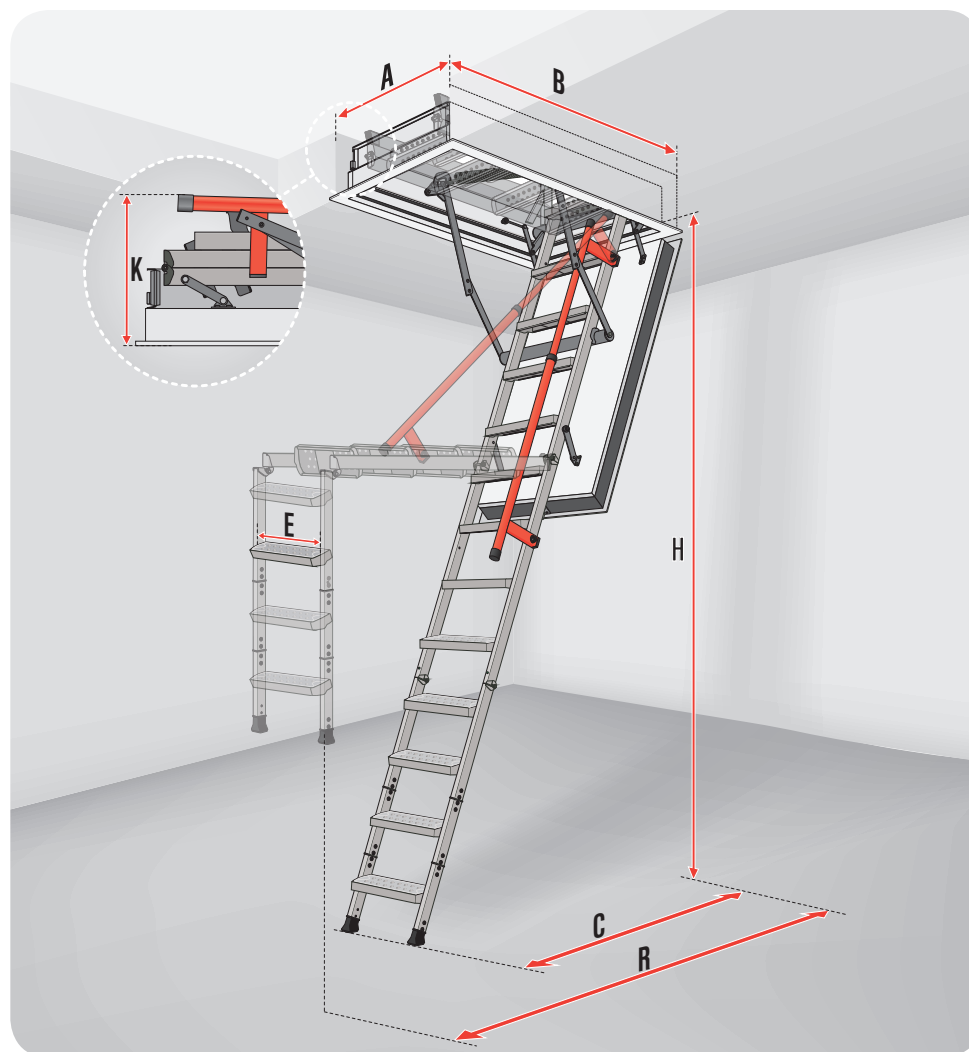

LMF LOFT LADDER DIMENSIONS

Ceiling opening dimensions [cm]	AxB	60x120	70x120	70x130	70x140	86x130	70x130	70x140	86x130
Maximum room height [cm]	H	280						305	
Minimum room height [cm]*	H _{min.}	233						256	
Box external dimensions [cm]		59x118	68x118	68x128	68x138	84x128	68x128	68x138	84x128
Internal box dimensions [cm]		55x114	64x114	64x124	64x134	80x124	64x124	64x134	80x124
Folded ladder height [cm]	K	34							
Swing space [cm]	R	165					176		
Distance after ladder unfolding [cm]	C	120					130		
Box height [cm]		16							

LADDER PARAMETERS

Tread length [cm]	E	35							
Tread width [cm]		13							
Distance between treads [cm]		25							

* for rooms lower than the maximum standard height H please adjust the length of the ladder according to the assembly instructions

LOFT LADDER

Commercial sizes [cm]		60x120	70x120	70x130	70x140	86x130	70x130	70x140	86x130
Room height [cm]	H	280					305		
Code		862501	862511	862512	862513	862596	862553	862554	862597

Ladders are available only in sizes shown above.

SCISSORS LOFT
LADDERS

SCISSORS
LOFT LADDERS

► BOX

The ladder box can be of wood, metal or a combination of a wooden box / metal frame. The box is equipped with a **peripheral seal** and **lining as standard**. The box enables the scissors ladder to be installed and adjusted quickly and with ease.

► HATCH UNLOADING MECHANISM

The hinge mechanism significantly simplifies ladder operation. Once unlocked, the hatch opens slowly to avoid any risk to the user. It then keeps the hatch in the fully open position and prevents spontaneous spring back during folding and unfolding.

► HARDWARE

The patented **corner hinge** design adds rigidity to the box and prevents distortion. This ensures that the ladder will continue to be operated trouble-free.

► HATCH

Scissors loft ladders are equipped with white **insulated** or **fire-resistant** hatches, made of either wood or wood and metal as standard. The external hatch surface is smooth to blend effectively with the visual style of any interior design.

► TREADS

The specially embossed pattern on the tread surface protects the user from accidental slipping while using the loft ladder.

► LADDER

The scissors ladder construction makes height adjustment a simple process **with no need for cutting**. It also enables the ladder to be folded to a smaller size and used in openings as small as 50 x 70cm. The elegant, modern style is achieved through use of 'S'-shaped stringers which can also be used as handrails.

SCISSORS
LOFT LADDERS



SCISSORS LOFT LADDERS

LST

STANDARD
**EN
14975**

U=1.1
W/m²K

The **LST** scissors loft ladder is equipped with a 3.6cm thick, white insulated hatch as standard. The box is made of wood and has quick-fit brackets while the hatch opening mechanism guarantees safe folding and unfolding. In addition, its construction has eliminated the need for a lock. The ladder itself is powder-coated in RAL 7022 Grey. The overall floor – ceiling ladder height can be increased to a maximum of 330cm by adding two LSS treads.



Wooden box with metal architrave lining and quick-fit brackets.



white hatch



possibility of adding or detaching tread



architrave lining



system of quick installation in the ceiling



peripheral seal



system of adapting the ladder length to the ceiling height



non-slip treads



possibility of installing additional accessories


Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LST LOFT LADDER DIAGRAM

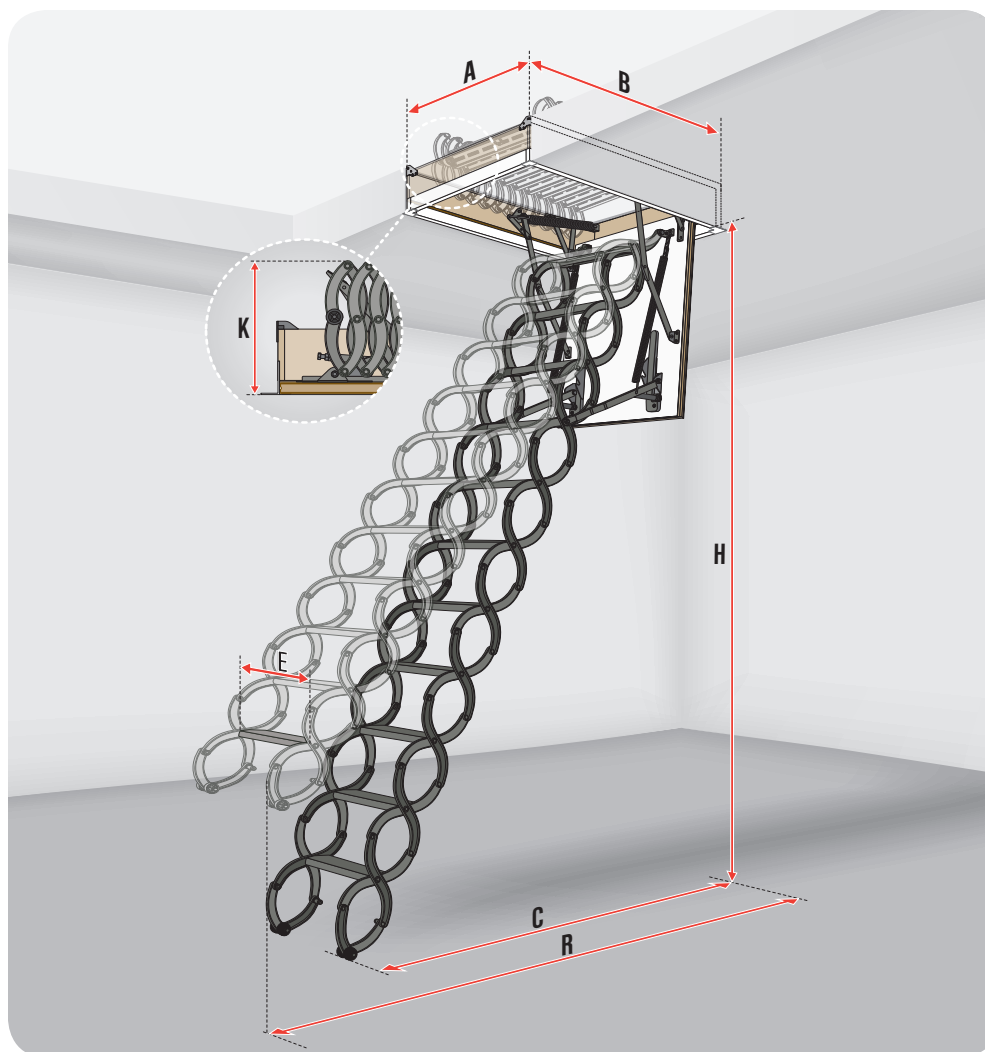

LST LOFT LADDER DIMENSIONS

		Standard ladder length				
Ceiling opening dimensions [cm]	AxB	51x80	60x90	60x120	70x80	70x120
Room height [cm]	H	250 – 280				
Box external dimensions [cm]		51x79.4	59x89.4	59x119.4	69x79.4	69x119.4
Internal box dimensions [cm]		46x74	54x84	54x114	64x74	64x114
Folded ladder height [cm]	K	38.2				
Swing space [cm]	R	150				
Distance after ladder unfolding [cm]	C	146 – 134				
Box height [cm]		18				

LADDER PARAMETERS

Tread length [cm]	E	26	30	38
Tread width [cm]		8		
Distance between treads [cm]		24-26		
Standard number of treads [units]		11		
Compatible tread LSS		LSS-26	LSS-31	LSS-38

Ladder shorter by 1 tread (10-tread ladder)		Standard ladder (11-tread ladder)		Ladder longer by 1 tread (12-tread ladder)		Ladder longer by 2 treads (13-tread ladder)	
230	250	250	280	280	300	300	330
Sizes and dimensions of loft ladder not included into the table are identical with those for heights 250-280cm							
140		150		160		170	
135	127	146	134	153	145	163	150

LOFT LADDER

Commercial sizes [cm]		51x80	60x90	60x120	70x80	70x120
Room height [cm]	H	250 – 280				
Code		860402	860432	860423	860426	860436

Code	860204	860205	860206
tread*	LSS-26	LSS-31	LSS-38
ladder width [cm]	51	60	70

Ladders are available only in sizes shown above.

* while ordering LSS tread- the ladder commercial size and type has to be provided

SCISSORS
LOFT LADDERS



SCISSORS LOFT LADDERS

LSZ

STANDARD
**EN
14975**

U=1.1
W/m²K

The **LSZ** loft ladder is the same as the LST except for the box, the construction of which consists of an integrated metal frame within the wooden box. It also has finishing slats and quick-fit brackets. The overall floor - ceiling ladder height can be increased to a maximum of 330cm by adding two LSS treads.



Metal frame integrated with wooden box plus lining and quick-fit brackets.



white hatch



possibility of adding or detaching tread



finishing lining slats



system of quick installation in the ceiling



peripheral seal



system of adapting the ladder length to the ceiling height



non-slip treads



possibility of installing additional accessories pages 54-59


Technical specification:
permissible loading of 200 kg
hatch heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm
hatch thickness 3.6 cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LSZ LOFT LADDER DIAGRAM

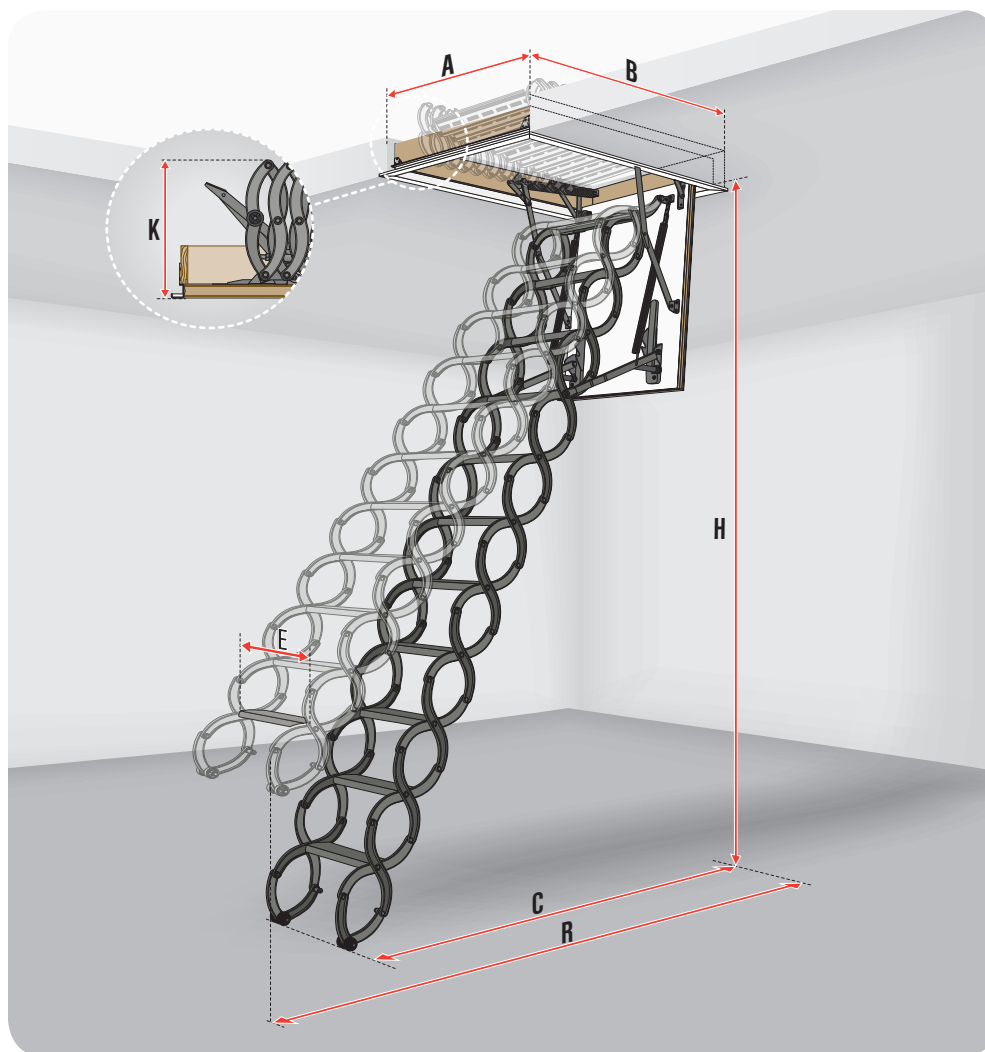

LSZ LOFT LADDER DIMENSIONS

		Standard ladder length		
Ceiling opening dimensions [cm]	AxB	51x80	70x80	70x120
Room height [cm]	H	250 – 280		
Box external dimensions [cm]		51x79.4	69x79.4	69x119.4
Internal box dimensions [cm]		46x74	64.8x74	64.8x114
Folded ladder height [cm]	K	38.5		
Swing space [cm]	R	150		
Distance after ladder unfolding [cm]	C	146 – 134		
Box height [cm]		14		

LADDER PARAMETERS

Tread length [cm]	E	26	38
Tread width [cm]		8	
Distance between treads [cm]		24-26	
Standard number of treads [units]		11	
Compatible tread LSS		LSS-26	LSS-38

LOFT LADDER

Commercial sizes [cm]		51x80	70x80	70x120
Room height [cm]	H	250 – 280		
Code		860502	860532	860536

Ladder shorter by 1 tread (10-tread ladder)		Standard ladder (11-tread ladder)		Ladder longer by 1 tread (12-tread ladder)		Ladder longer by 1 tread (12-tread ladder)	
230	250	250	280	280	300	300	330
Sizes and dimensions of loft ladder not included into the table are identical with those for heights 250-280cm							
140		150		160		170	
135	127	146	134	153	145	163	150

Code	860204	860206
tread*	LSS-26	LSS-38
ladder width[cm]	51	70

Ladders are available only in sizes shown above.

* while ordering LSS tread- the ladder commercial size and type has to be provided

METAL SCISSORS
LOFT LADDERS

SCISSORS LOFT LADDERS

LSF
FIRE-RESISTANT

EN 13501-2
EI₂ 60

STANDARD
EN 14975

U=1.8*
W/m²K

The **LSF** fire-resistant loft ladder has a 60-minute fire rating and acts as a barrier to prevent spread of flame. The overall floor - ceiling ladder height can be increased to a maximum of 320cm by adding one LSS tread.

The loft ladder hatch is equipped with an expanding seal, which under the influence of high temperature increases its volume and prevents fire from spreading to the fire free storey.

*manufacturer's internal research



fire-resistant hatch on one side



architrave lining



non-slip treads



possibility of adding or detaching tread



system of quick installation in the ceiling



system of adapting the ladder length to the ceiling height



possibility of installing additional accessories pages 54-59


Technical specification:
permissible loading of 200 kg
fire-resistance EI₂=60 minutes
insulation thickness 3 cm
hatch thickness 5.6cm

fully assembled,
and ready for quick
installation in the ceiling



3 years
WARRANTY

LSF LOFT LADDER DIAGRAM

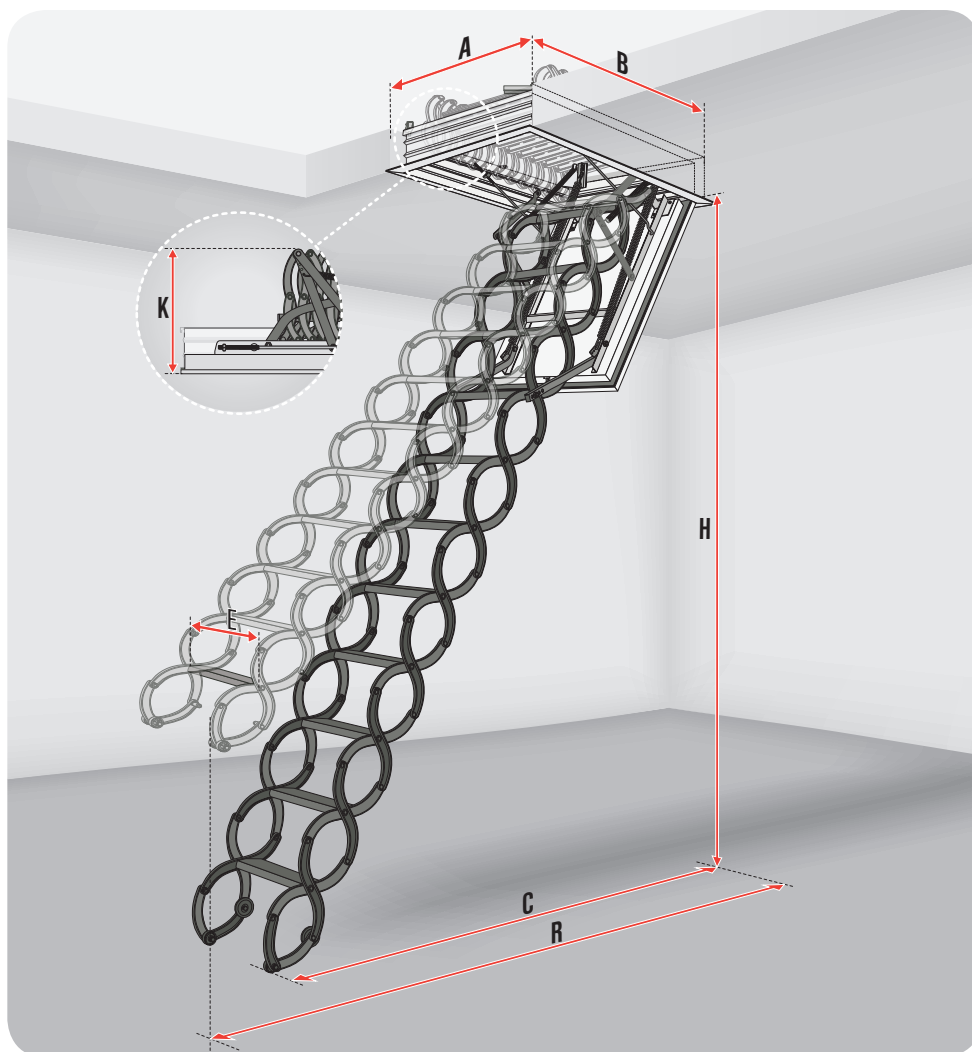

LSF LOFT LADDER DIMENSIONS

		Standard ladder length					
Ceiling opening dimensions [cm]	AxB	50x70	60x90	60x120	70x80	70x90	70x120
Room height [cm]	H	270 – 300					
Box external dimensions [cm]		48x68.5	58x88.5	58x118.5	68x78.5	68x88.5	68x108.5
Internal box dimensions [cm]		44.8x64.8	54.8x84.8	54.8x114.8	64.8x74.8	64.8x84.8	64.8x104.8
Folded ladder height [cm]	K	46					
Swing space [cm]	R	170 – 180					
Distance after ladder unfolding [cm]	C	165 – 130					
Box height [cm]		14					

LADDER PARAMETERS

Tread length [cm]	E	30	32	40
Tread width [cm]		8		
Distance between treads [cm]		25 – 30		
Standard number of treads [units]		10		
Compatible tread LSS		LSS-30	LSS-32	LSS-40

LOFT LADDER

Commercial sizes [cm]	50x70	60x90	60x120	70x80	70x90	70x110	70x120
Room height [cm]	270 – 300						
Code	860101	860123	860126	860132	860133	860135	860136

Ladder shorter by 1 tread (9-tread ladder)		Standard ladder (10-tread ladder)		Ladder longer by 1 tread (11-tread ladder)	
240	270	270	300	300	320
Sizes and dimensions of loft ladder not included into the table are identical with those for heights 250-280cm					
165	165	170	180	185	210
100	140	165	130	120	140

Code	860201	860202	860203
tread*	LSS-30	LSS-32	LSS-40
ladder width [cm]	50	60	70

Ladders are available only in sizes shown above.

* when ordering LSS tread- the ladder commercial size and type has to be provided


WOODEN
DOORS



L-SHAPED COMBINATION DOORS

DWK

DWK L-Shaped combination doors are intended to be built into walls to provide access to the unused space behind. They offer excellent thermal insulation parameters ($U=1.1\text{W/m}^2\text{K}$) and airtightness to minimise heat loss. Left or right-hand opening versions are available, standard doors being equipped with 3.5cm wide natural timber-coloured slats. The 3.6cm insulated sash is of HDF and has a white veneer on both sides and pine frame.

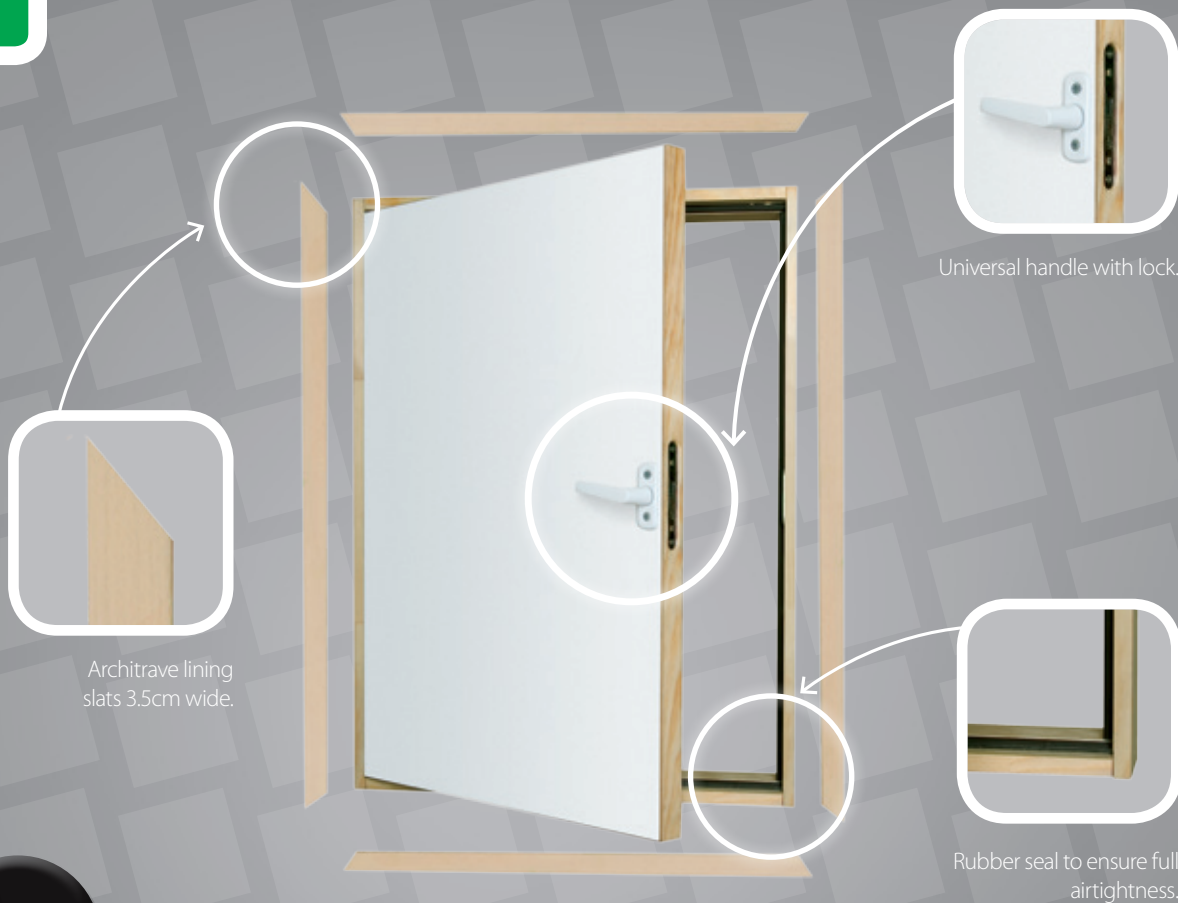

$U=1.1^*$
 $\text{W/m}^2\text{K}$

* manufacture's internal testing for the middle part of the sash



architrave lining



Technical specification:


heat transmission coefficient $U = 1.1 \text{ W/m}^2\text{K}$
insulation thickness 3 cm

fully assembled,
and ready for quick
installation



3 years
WARRANTY

DWK DOOR DIAGRAM

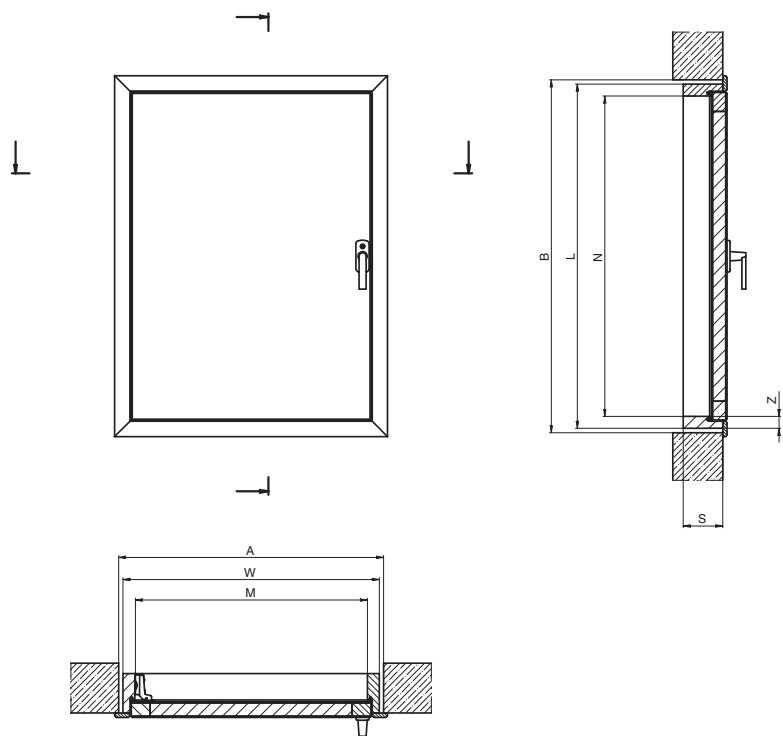

DWK L-SHAPED DOORS DIMENSIONS

Opening dimensions [cm]	AxB	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Door dimensions [cm]	WxL	53.4x78.4	58.4x78.4	58.4x98.4	58.4x108.4	68.4x88.4	68.4x98.4	68.4x108.4
Frame internal dimensions [cm]	MxN	48x73	53x73	53x93	53x103	63x83	63x93	63x103
Frame width [cm]	S	8.5						
Frame thickness [cm]	Z	2.7						

L-SHAPED DOORS

Commercial sizes [cm]	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Code	869900	869922	869924	869925	869933	869934	869935

DWK doors are available only in sizes shown above.

WOODEN
DOORS



HIGHLY ENERGY-EFFICIENT WOODEN DOORS

DWT
HIGHLY ENERGY
EFFICIENT

The **DWT** highly energy efficient L-shaped doors are designed primarily for installation in L-shaped walls, provide access to the room behind and at the same time constitute an excellent barrier against heat loss (heat transfer coefficient $U = 0.6 \text{ W / m}^2\text{K}^*$) and guarantee high tightness. The door can be installed in the right or left side. They are as standard equipped with wooden architrave lining in natural colour.



4 CLASS**
EN12207

U=0.6*
W/m²K

*manufacturer's internal testing for sash
** manufacture's internal research



architrave lining



Technical specification:


heat transmission coefficient $U = 0.6 \text{ W/m}^2\text{K}^*$
insulation thickness 6 cm

fully assembled,
and ready for quick
installation



3 years
WARRANTY

DWT DOOR DIAGRAM

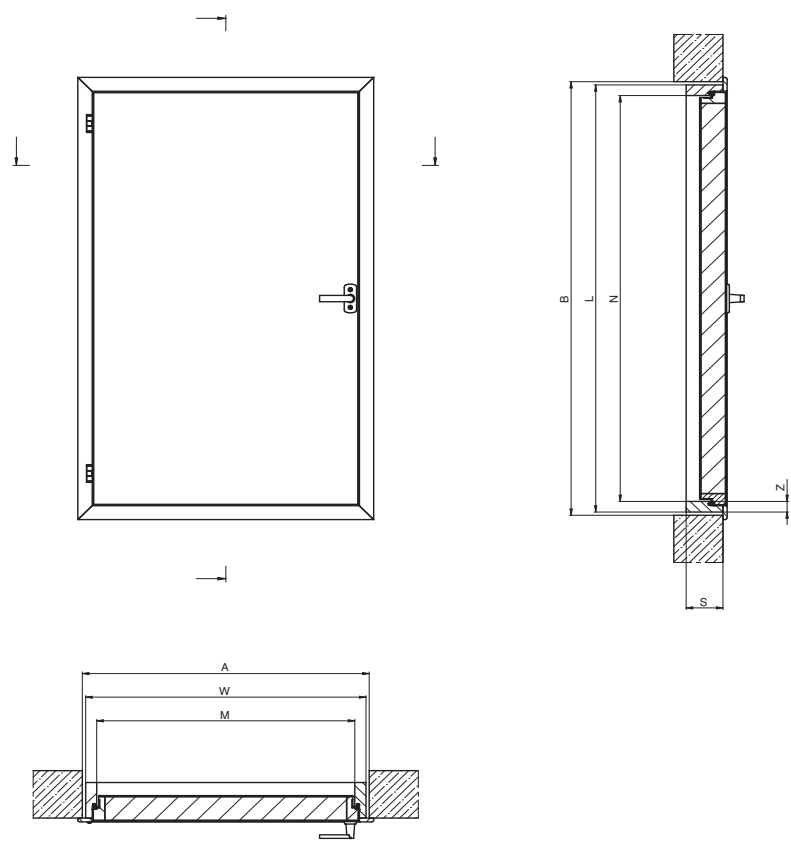

DWT L-SHAPED DOORS DIMENSIONS

Opening dimensions [cm]	AxB	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Door dimensions [cm]	WxL	53.4x78.4	58.4x78.4	58.4x98.4	58.4x108.4	68.4x88.4	68.4x98.4	68.4x108.4
Frame internal dimensions [cm]	MxN	48x73	53x73	53x93	53x103	63x83	63x93	63x103
Frame width [cm]	S	9						
Frame thickness [cm]	Z	2.7						

L-SHAPED DOORS

Commercial sizes [cm]	55 x 80	60 x 80	60 x 100	60 x 110	70 x 90	70 x 100	70 x 110
Code	869600	869622	869624	869625	869633	869634	869635

DWT doors are available only in sizes shown above.


WOODEN
DOORS



L-SHAPED COMBINATION DOORS

DWF L-Shaped combination fire-resistant doors have a 45-minute fire rating – (EN 13501-2) to protect against the spread of flame while providing access to unused space behind a wall. The white 6.6cm thick sash has thermo insulation to provide an excellent barrier against heat loss ($U = 0.64 \text{ W/m}^2\text{K}^*$). The door can be installed in the right or left side. They are as standard equipped with wooden architrave lining in natural colour.

DWF
FIRE-RESISTANT

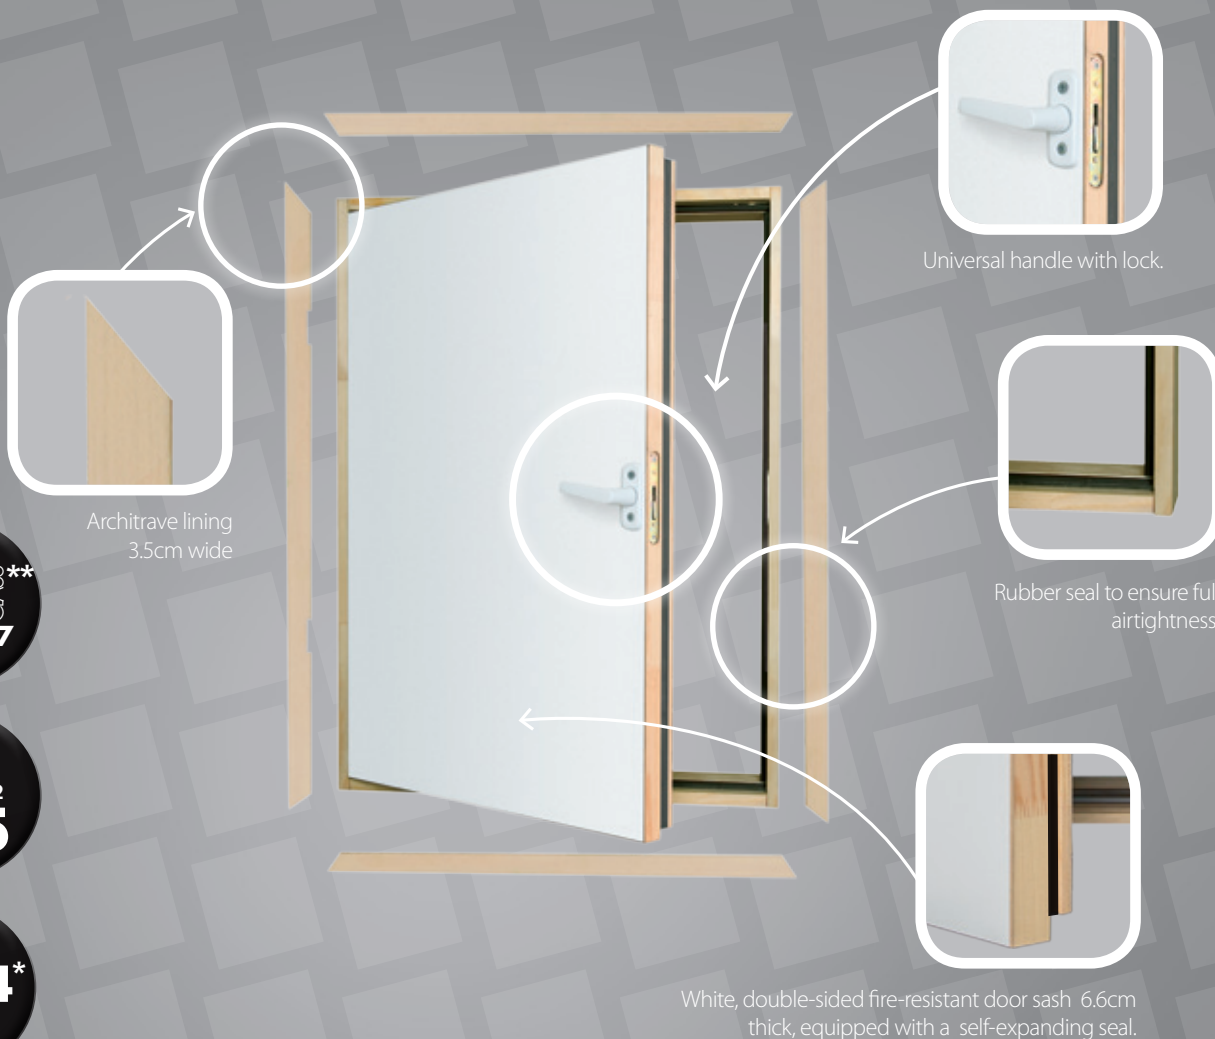

4 CLASS**
EN12207

EN 13501-2
EI, 45

U=0.64*
W/m²K

*manufacturer's internal testing for sash
** manufacture's internal research



architrave lining



fire-resistant white sash
on both sides




Technical specification:
fire-resistance EI₁/EI₂=45 minutes
heat transmission coefficient $U = 0.64 \text{ W/m}^2\text{K}^*$
insulation thickness 6 cm

fully assembled,
and ready for quick installation in the ceiling



3 years
WARRANTY

DWF DOOR DIAGRAM

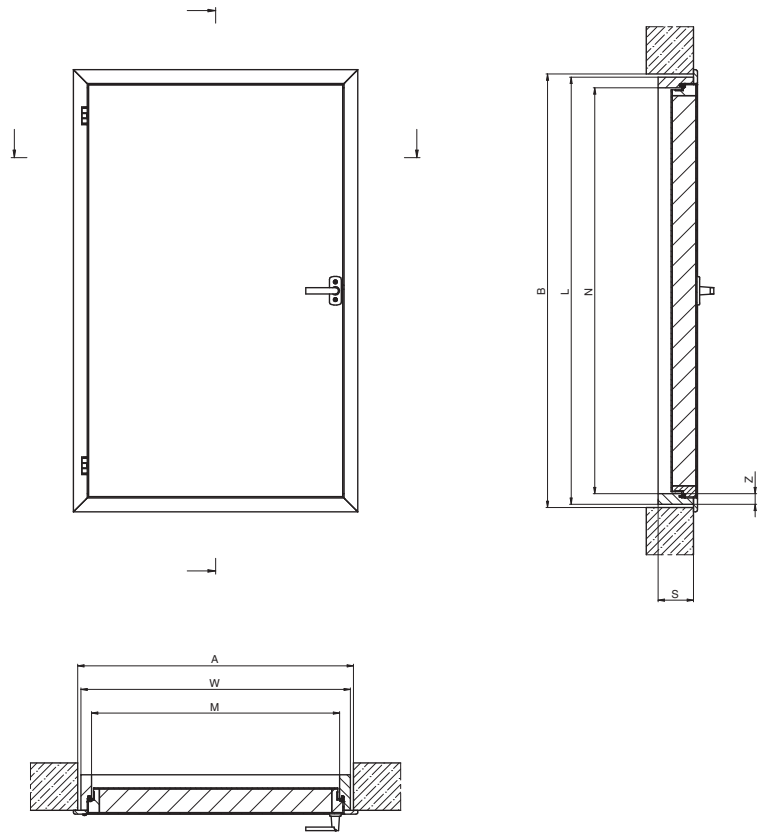

DWF L-SHAPED DOORS DIMENSIONS

Opening dimensions [cm]	AxB	55x80	60x80	60x100	60x110	70x90	70x100	70x110
Door dimensions [cm]	WxL	53.4x78.4	58.4x78.4	58.4x98.4	58.4x108.4	68.4x88.4	68.4x98.4	68.4x108.4
Frame internal dimensions [cm]	MxN	48x73	53x73	53x93	53x103	63x83	63x93	63x103
Frame width [cm]	S	9						
Frame thickness [cm]	Z	2.7						

L-SHAPED DOORS

Commercial sizes [cm]	55 x 80	60 x 80	60 x 100	60 x 110	70 x 90	70 x 100	70 x 110
Code	869800	869822	869824	869825	869833	869834	869835

DWF doors are available only in sizes shown above.

BALUSTRADE LXB-U

The loft balustrade is made of pine wood, protects the ceiling opening in the attic and makes it easier and safer to descend the ladder. The LXB-U is installed directly to the loft floor and is strengthened with flat-bars. The LXB-U balustrade is suitable for the biggest loft ladder size 86x140 cm, so it can be applied to all types of loft ladder without cutting its horizontal bars.



**UNIVERSAL
SIZE**
without
necessity
of cutting

LXB-U Balustrade	Available for loft ladders
	all FAKRO loft ladders
Standard dimensions [cm]	86 x 140
Non-standard dimensions [cm]	for loft ladder sizes smaller than 86x140 cm, the standard size balustrade is applied
Balustrade height [cm]	110

Code	80AZ04
-------------	---------------

INSTALLATION BRACKETS LXK

Installation brackets facilitate loft ladder installation in the ceiling. Installed in the corners of the box, they add to its overall rigidity ensuring equal lengths of diagonals. Bolts are screwed into brackets guaranteeing quick and accurate levelling of the loft ladder in the ceiling.



Installation brackets	Available for loft ladders										
	LWK Komfort	LWL Extra	LTK Energy	LWT	LWT Passive House	LWF 45	LDK	LMS	LMK	LMP	LMF 45
Installation to the ceiling max. thickness [cm]	35		39	43			35			39	43

Code	62085
-------------	--------------

ARCHITRAVE LININGS LXL

The architrave is designed to finish the installation of the loft ladder and to cover gaps in the ceiling which remain after the fitting process. The architrave elements are of solid pine wood (LXL-P) or in white (LXL-W) or PVC (LXL-PVC). This quick and simple fitting process ensures a fast, aesthetically pleasing finish of the installed Loft Ladder. In the case of PVC architrave, connection with the box does not require any nails. The LXL-PVC architrave is available in white*.

Architrave linings LXL-P/-W	Available for loft ladders													
	LWK Komfort	LWL Extra	LTK Energy	LWT	LWT Passive House	LWF 45	LDK	LMS	LMK	LMS	LMK	LMP	LMF45	
Standard dimensions [cm]	70x140, 86x144													
Non-standard dimensions [cm]	For other loft ladders sizes , cut the slats from the standard architrave lining size.													
Slats thickness after installation on box [cm]	1													
Slats width [cm]	3.5													
Max. width of the gaps, the architrave slats cover after instillation on the box [cm]	2.5													



	LXL-P		LXL-W	
	70x140	86x144	70x140	86x144
Code	62087	80AZ52	62088	80AZ54

Architrave linings LXL-PVC	Available for loft ladders										
	LWKKomfort	LWLExtra	LTKEnergy	LWT	LWT Passive House	LWF45	LDK	LMS	LMK	LMP	LMF45
Standard dimensions [cm]	60x120, 70x120, 86x140, 86x144										
Non-standard dimensions [cm]	For other loft ladders sizes, cut the slats from the standard architrave lining size.										
Slats thickness after installation on box [cm]	1										
Slats width [cm]	3.3										
Max. width of the gaps, the architrave slats cover after instillation on the box [cm]	2.4										



	LXL-PVC			
	60x120	70x120	86x140	86x144
Code	62082	62083	62084	80AZ 56

* the architrave lining colour may slightly differ from the colour of lining in angles and hatch

INVISIBLE ARCHITRAVE LXL-I

The LXL-Invisible linings allow for discreet installation and concealment loft ladders in the ceiling. Thanks to the use of linings, the ladder box remains invisible. There is no need to install architrave linings masking the gaps, and the loft ladder hatch is hidden in the ceiling. The use of a discrete assembly system allows for an aesthetic and minimalistic interior finish. Installation of LXL-Invisible linings with loft ladders should be done before finishing the ceiling with plasterboards.

Invisible architrave LXL-I	Available for loft ladders		
	LWS Plus, LWK Plus, LWL Extra, LTK Energy, LWT, LWT PH, LDK, LMS, LMK		
Standard dimensions [cm]	60x120cm, 70x120cm, 86x140cm		
Non-standard dimensions [cm]	For other loft ladders sizes, cut the slats from the standard architrave lining size.		
The thickness of the plasterboards to which the lining is adapted	12.5		
	LXL-I		
	60x120	70x120	86x140
Code	80AZ68	80AZ69	80AZ70

NEW!



BOX EXTENSION LXN

Made of pine, the box extension matches perfectly with the box of the installed ladder and enhances the look of the ceiling opening. In addition, in case of thick ceilings, for 4-segment and scissors LST and LSZ loft ladders, the box extension serves as an extension element of a box height allowing for installation of the LXW upper hatch (see LXW, page 57).




Box extension LXN			Available for loft ladders																	
			LWK Komfort	LWZ Plus	LWL Extra	LTK Energy	LWT	LWT Passive House	LWF 45	LDK	LMS	LMK	LML	LMF 45	LMF	LST	LSZ			
Height of the box extension frame [cm]			10																	
Max. height of non-standard box extension [cm]			20								16		20							
LXN box extension commercial size [cm]			51 x 80	55 x 100	55 x 111	60 x 90	60 x 94	60 x 100	60 x 111	60 x 120	60 x 130	60 x 140	70 x 80	70 x 94	70 x 100	70 x 111	70 x 120	70 x 130	70 x 140	86 x 130
Code			862300	862320	862321	862322	862307	862306	862304	862301	862302	862303	862332	862317	862316	862314	862311	862312	862313	862396

When ordering standard and non-standard box extensions, please specify the model and commercial size of loft ladders. The provided box extension size will be compatible with the loft ladder box.

ADDITIONAL TREAD LXT

An additional tread makes climbing the ladder easier and increases comfort and safety when accessing the loft space. Made of wood, it is installed between the final tread and loft floor and is particularly recommended for use in situations where the upper hatch is installed on the ladder box or where ladders are installed in a thick ceiling.

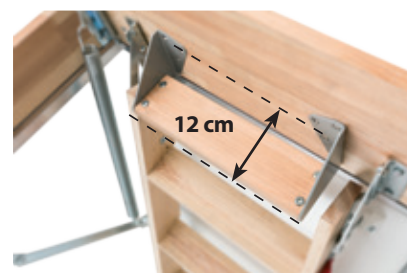

Additional tread LXT	Available for loft ladders						
	LWK Komfort (size 55x111)	LWL Extra (sizes 60x...)	LWK Komfort (except size 55x111)	LWL Extra (except sizes 60x...)	LWZ Plus	LMS	LMK
	LXT 280		LXT 300				
Loft ladder's tread length [cm]	30		34				
	LXT 280		LXT 300				
Code	62058		62059				

UPPER HATCH LXW

The LXW Upper Hatch prevents attic dust from accumulating on the hatch and steps of the closed ladder. It improves the overall insulating parameters and airtightness of the ladder on which it is installed. The upper hatch consists of a frame equipped with a peripheral gasket, 3.6cm thick hatch door, hardware, installation brackets, gas piston and rotational closing handle. In order to close the upper hatch from the loft side, it is possible to install an additional LXZ handle.



Upper hatch LXW	Available for loft ladders																	
	LWK Komfort	LWZ Plus	LWL Extra	LTK Energy	LWT	LWT Passive House	LWF 45	LMS	LMK	LML	LMF 45	LMF	LST	LSZ				
Max. thickness of the ceiling where the upper hatch can be installed [cm]	31 or after standard box extension installation 41. For 4 section ladders the use of the box extension is a must.	31 or after standard upper hatch installation 41.		35 or after standard box extension installation 45. With 4-section loft ladders extension box must be applied.	39 or after standard box extension installation 49. With 4-section loft ladders extension box must be applied.			31 or after standard box extension installation 41.		48 or after standard box extension installation 58.	39 or after standard box extension installation 49.	33 or after standard box extension installation 43.	41, the box extension installation is a must					
Upper hatch box height [cm]	20																	
Commercial sizes of LXW [cm]	51x80	55x100	55x111	60x90	60x94	60x100	60x111	60x120	60x130	60x140	70x80	70x94	70x100	70x111	70x120	70x130	70x140	86x130
Code	862200	862220	862221	862222	862207	862206	862204	862201	862202	862203	862232	862217	862216	862214	862211	862212	862213	862296

When ordering standard and non-standard upper hatches, please specify the model and commercial size of loft ladders. The provided upper hatch size will be compatible with the loft ladder box.

HANDLE LXZ

The LXZ handle enables the LXW upper hatch to be closed from the loft side e.g. during maintenance work in the loft or on the roof.


Code	80AZ01
------	--------



STILE ENDS LXS

The **LXS Stile Ends** are finishing elements mounted on the base of the ladder, adding a smart touch to its appearance. They add to the ladder's stability and are made from specially selected material to protect the floor from being scratched. They are available for all segment of loft ladders with wooden ladder sections (besides 4-section and LDK loft ladder).

Code	62027
------	-------

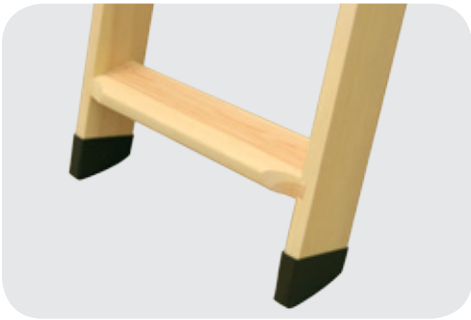


UNLOADING MECHANISM LXM

The unloading mechanism assists in folding and unfolding the ladder thus increasing the comfort and safety of using loft ladders. Available for 3- segment loft ladders. **The LXM** installation possible on the right or left side of the ladder, on the opposite side to the LXH handrail.

Unloading mechanism LXM	Available for loft ladders	
	LWK Komfort, LWZ Plus, LTK Energy, LWT, LWT PH, LWF45	
LXM_3	only for 3- segment loft ladders, minimum room height 260cm	

Code	869373
------	--------

NEW!

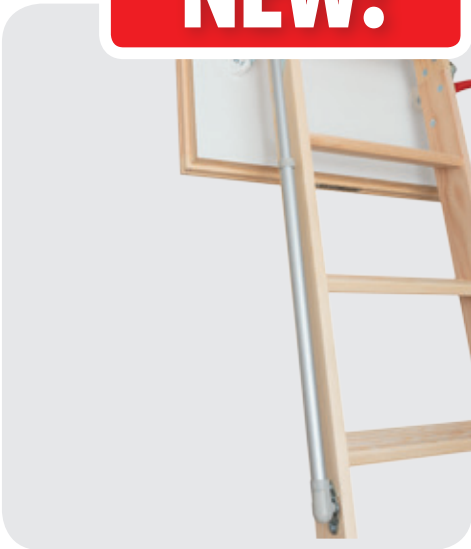

HANDRAIL LXH

The **LXH Metal Handrail** makes climbing the ladder easier and increases user's safety and comfort. It is mounted onto upper ladder section.

Handrail LXH	Available for loft ladders		
	LWK Komfort, LWZ Plus, LTK Energy, LWT, LWT Passive House, LWF45, LMS, LMK, LMF45		LDK
Handrail is installed to the upper ladder section	LXH *50/13	LXH *75/13	LXH 75/16
Code	80AZ24	80AZ18	62065



* Handrails LXH 50/13 are installed to ladder with boxes up to 100cm in length; handrails LXH 75/13 to ladders with boxes over 100cm in length
In the LMF45 loft ladders, the additional LXH handrail is compatible only with the loft ladders version heights up to 280 and 305cm

ASSEMBLY KIT LXX-D

The LXX-D assembly kit simplifies and improves the installation of LML loft ladders to the ceiling, on which the DRL hatch has already been installed. Installation in ceilings with a thickness of min. 38cm, maximum 50cm.

Code	80AZ41
------	--------

NEW!



INSULATION KIT LXD

The **LXD Insulation Kit** provides the standard of tight insulation between the ladder box and ceiling opening needed in energy-efficient construction. It includes: airtight collar, insulation material (sheep wool blocks) and an air permeable collar.




Installation kit LXD	Available for loft ladders						
	LWK Komfort	LWL Extra	LTK Energy	LWT	LDK	LMS	LMK
Standard dimensions [cm]	60/70x120 oraz 86 x 140						
Non-standard dimensions	For ladders smaller than 86x140 cm the standard size of the kit has to be adapted						
Commercial sizes LXD	60x120	70x120	86x140				
Code	80AZ13	80AZ14	80AZ15				

AVAILABLE ADDITIONAL ACCESSORIES

	LWK Komfort	LWZ Plus	LWL Extra	LTK Energy	LWT	LWT PH	LWF 45	LDK	LMS	LMK	LML	LMP	LMF 45	LMF	LST	LSZ	LSF
LXB-U balustrade	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
LXK installation brackets	✓	—	✓	✓	✓	✓	✓	✓	✓	✓	—	✓	✓	—	—	—	—
LXL architrave lining (wooden)	✓	—	✓	✓	✓	✓	✓	✓	✓	✓	—	✓	✓	—	—	—	—
LXL-PVC architrave lining (plastic)	✓	—	✓	✓	✓	✓	✓	✓	✓	✓	—	✓	✓	—	—	—	—
LXL-I architrave	✓	—	—	✓	✓	✓	—	—	✓	✓	—	—	—	—	—	—	—
LXH handrail	✓	✓	—	✓	✓	✓	✓	✓	✓	✓	—	—	✓**	—	—	—	—
LXN box extension	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	—	✓	✓	✓	✓	—
LXT additional tread	✓	✓	✓	—	—	—	—	—	✓	✓	—	—	—	—	—	—	—
LXW upper hatch	✓*	✓	✓	✓*	✓*	✓	✓*	—	✓	✓	✓	—	✓	✓	✓*	✓*	—
LXS stile ends (only for 3 sections ladders)	✓	✓	✓	✓	✓	✓	✓	—	—	—	—	—	—	—	—	—	—
LXM unloading mechanism (only for 3 sections ladders)	✓	✓	—	✓	✓	✓	✓	—	—	—	—	—	—	—	—	—	—
LXX-D assembly kit	—	—	—	—	—	—	—	—	—	—	✓	—	—	—	—	—	—
LXD insulation kit	✓	—	✓	✓	✓	—	✓	✓	✓	✓	—	—	—	—	—	—	—

* for 4 section loft ladders and scissors the LXN box extension is mounted prior to the upper hatch LXW installation

**In the LMF45 loft ladders, the additional LXH handrail is compatible only with the loft ladders version heights up to 280 and 305cm

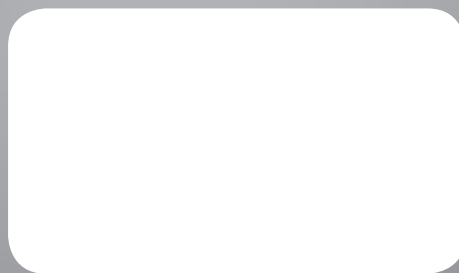

Fakro GB Ltd
Fakro House
Astron Business Park
Hearthcote Road
Swadlincote DE11 9DW
telephone : 01283 554755 fax : 01283 224545
www.fakro.co.uk e-mail: sales@fakrogb.com