

# YOUNGMAN®

## LADDERS AND ACCESS EQUIPMENT



**TRADE  
APPROVED  
SINCE  
1926**

# A leading brand of ladders and work at height products - since 1926

The Youngman brand is built on strong values of safety, innovation and quality and is recognised as the leading UK ladder brand - used by tradesmen day in day out.

Every Youngman ladder is built to last, built to protect you, built to save you money in the long run and built to perform at the highest standards. All our ladders are tested by independent accredited third parties to meet the latest UK and European standards.

From builders stepladders to shock-resistant fibreglass, work platforms and extension ladders, Youngman has the full range, with special features to help you work safely and efficiently.

Available from leading trade merchants and stockists throughout the UK. Backed by our next day delivery service providing direct to home or site delivery. To see the full range or find your nearest stockist visit [www.youngmanaccess.com](http://www.youngmanaccess.com)

For our range of BoSS access towers visit [www.bosaccess Towers.com](http://www.bosaccess Towers.com)



## **NEXT DAY DELIVERY ON ORDERS PLACED BEFORE 12 NOON.**


Next day delivery is via a courier service for which there is a charge. Order by 12 noon for a guaranteed overnight delivery to UK mainland only. Subject to stock availability, excludes weekends and bank holidays.

About Us . . . . .	1
How To Choose . . . . .	3
<b>Stepladders</b>	
Builders Steps . . . . .	5
Builders Platform Steps. . . . .	6
S400 Fibreglass Steps . . . . .	7
S400 Fibreglass Platform Steps. . . . .	8
Megasteps . . . . .	9
Atlas Steps . . . . .	10
<b>Stepstools</b>	
2 Step Stepstool . . . . .	11
<b>Combination Ladders</b>	
Multi-Purpose . . . . .	12
3 in 1 Combination Ladder . . . . .	13
Combi 100 4 Way . . . . .	14
Pro-Deck® 5 Way . . . . .	15
<b>Extension Ladders</b>	
Trade 200 Aluminium Ladders . . . . .	16
S200 Fibreglass Ladders. . . . .	17
Telescopic Ladders. . . . .	18
<b>Ladder Accessories</b>	
LadderLok . . . . .	19
Ladder Rack Clamp . . . . .	19
Roof Hook . . . . .	20
Ladder Stay . . . . .	20
<b>Roof Ladders</b>	
Single Section Roof Ladders . . . . .	21
Double Section Roof Ladders . . . . .	22
<b>Work Platforms</b>	
Odd Job 600 . . . . .	23
Odd Job . . . . .	23
<b>Loft Ladders</b>	
Eco S Line . . . . .	24
Timberline . . . . .	25
Spacemaker . . . . .	26
Easiway . . . . .	27
Deluxe . . . . .	28
Telescopic . . . . .	29
<b>Access Towers</b>	
MiniMax®. . . . .	30

# HOW TO CHOOSE

**Always select the correct access equipment for the job. Check the type of product, the working height required and the maximum safe working load.**  
**Always select the access equipment that meets the required standards.**  
**Always follow the manufacturer's safety and operating instructions.**

Ladder Style	Classification	Maximum Load
Stepladders Combination Ladders Extension Ladders	EN131 Professional	150kg
	EN131 Non Professional	150kg
Stepstools	EN14183	150kg
Loft Ladders	EN14975	150kg




The ladder standards in the UK have changed to a single British and European product standard covering all types of portable ladders. In 2019 our Youngman ladders are changing to the new EN131 standard, with ladders having a load capacity of 150kg. There is one standard with two classifications:

## EN131 Professional



## EN131 Non-Professional



Products will need to be independently tested and certified for compliance and labelled with the new EN131 standard. Safety bodies such as Trading Standards and the HSE will expect manufacturers to comply and recommend that as users replace their ladders, they should comply with the new standard.

## WORKING AT HEIGHT - THE REGULATIONS

**The Work at Height Regulations (2007), contain the following key messages:**

1. Take positive steps to prevent or reduce risk.
2. Follow the hierarchy for managing risk.
3. Do a risk assessment.
4. Only competent people should plan, organise and carry out work a height.
5. Always use the safest equipment to prevent falls.
6. Make sure equipment to mitigate the effects of a fall is also used.

# OUR LADDERS HAVE THEIR UPS AND DOWNS. 50,000 OF THEM.

- Strength and durability tested 50,000 times
- Wide base on ladders over 3 metres
- Strong material components and extra bracing
- New weight loads tested
- New test on slippery glass surface
- EN131 certified



# Builders Steps



Load includes  
user & materials.



Tough and reliable choice for professionals who need a ladder for frequent, heavy duty work.

## TOUGH AND ROBUST

- Made from high grade aluminium
- Heavy gauge plastic edge caps for a smooth profile
- Heavy duty internal spreaders
- Strong, deep treads
- Large, non-slip feet



### Suitable for Professional & Non-Professional use

Product Code	Treads	Closed Length (m)	Open Height (m)	Safe Working Height (m)*	Weight (kg)
30599618	5	1.21	1.06	2.18	4.64
30699618	6	1.44	1.27	2.39	5.55
30799618	7	1.67	1.48	2.60	6.36
30899618	8	1.90	1.69	2.81	7.29
31099618	10	2.37	2.11	3.23	9.46
31299618	12	2.83	2.53	3.65	11.70

\*Based on 1.75m as the average reach height of a person.

# Builders Platform Steps



Load includes  
user & materials.



The extra-strong platform combined with a high knee rail provides a secure and comfortable work area.

## EXTRA-STRONG PLATFORM

- Secure standing platform
- Made from high grade aluminium
- Heavy gauge plastic edge caps for a smooth profile
- Extended support rail for greater user comfort
- Heavy duty internal spreaders
- Strong, deep treads
- Large, non-slip feet



### Suitable for Professional & Non-Professional use

Product Code	Treads	Closed Length (m)	Platform Height (m)	Safe Working Height (m)*	Weight (kg)
30431218	4	1.67	0.85	2.60	6.65
30631218	6	2.13	1.27	3.02	8.60
30831218	8	2.60	1.69	3.44	10.78
31031218	10	3.06	2.11	3.86	12.98
31231218	12	3.52	2.53	4.28	15.25

\*Based on 1.75m as the average reach height of a person.



# S400 Fibreglass Steps



Load includes  
user & materials.




EN131



Designed to withstand heavy trade use, with non-conductive stiles for working around electricity.

## LONG LIFESPAN & GREAT BUILD

- Integral tool tray to keep tools and materials handy whilst you work
- Semi-tubular rivets provide rigid fixings
- 'H-spreader' enables single-handed operation and add to the strength of the ladder
- Generous 298mm tread pitch gives excellent working heights
- Slip-resistant tread profile for added strength & security
- Heavy duty bracing for enhanced strength to protect rail & tread against damage

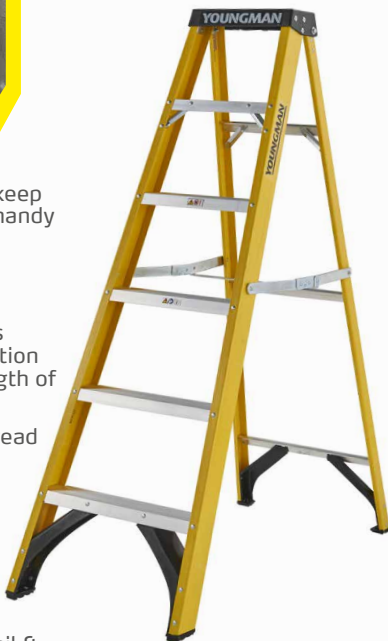

### Suitable for Professional & Non-Professional use

Product Code	Treads	Closed Length (m)	Top Tread Height (m)	Safe Working Height (m)*	Weight (kg)
52744418	4	1.24	1.12	2.04	6.79
52745518	5	1.54	1.40	2.32	7.70
52744618	6	1.84	1.67	2.59	8.80
52745718	7	2.13	1.95	2.87	10.00
52744818	8	2.42	2.23	3.15	11.61
52745018	10	3.02	2.79	3.70	16.56

\*Based on 1.75m as the average reach height of a person.



# S400 Fibreglass Platform



Load includes  
user & materials.



Non-conductive fibreglass stiles, ideal for working around electricity.

SUITABLE FOR  
**HEAVY TRADE**

- Integral tool tray to keep tools and materials handy whilst you work
- Semi-tubular rivets provide rigid fixings
- New steel platform for added strength-cycle tested to over 50,000 cycles 150kgs
- Heavy duty internal spreaders increase usability and ease of stowage
- Generous 250mm tread pitch gives excellent working heights
- Slip-resistant tread profile for added strength & security
- Heavy duty bracing for enhanced strength to protect rail & tread against damage



## Suitable for Professional & Non-Professional use

Product Code	Treads	Closed Length (m)	Platform Height (m)	Safe Working Height (m)*	Weight (kg)
52745418	4	1.68	0.93	2.68	9.15
52745618	6	2.18	1.40	3.15	11.75
52745818	8	2.68	1.87	3.62	15.17
52746018	10	3.18	2.33	4.08	18.13

\*Based on 1.75m as the average reach height of a person.

# MEGASTEPS



Load includes user & materials.



Large platform GRP steps, stable and secure.

## HANDRAILS FOR SAFETY

- Non-conductive fibreglass stiles for working around electricity
- Twin handrails for safety
- Safety chain for security
- Extra-large platform provides a secure and comfortable work area
- Large treads for comfort



### Suitable for Professional & Non-Professional use

Product Code	Treads	Closed Length (m)	Platform Height (m)	Safe Working Height (m)*	Weight (kg)
30090218	2	1.45	0.42	2.17	11.0
30090418	4	1.91	0.85	2.60	14.0
30090618	6	2.38	1.27	3.02	17.0
30090818	8	2.85	1.70	3.45	20.0

\*Based on 1.75m as the average reach height of a person.


# Atlas Steps



Load includes  
user & materials.



Designed to provide maximum comfort for the user, ideal for every day jobs around the worksite.

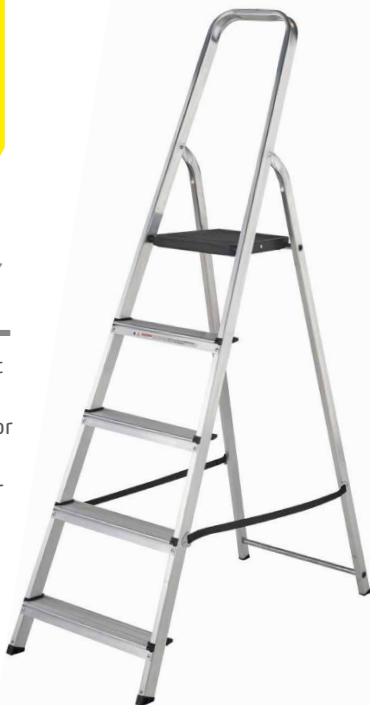

## HIGH SAFETY HANDRAIL

- Lightweight but robust design
- High safety handrail for added stability
- New steel platform for added strength-cycle tested to over 50,000 cycles using 150kgs
- Strong, slip-resistant, deep treads for comfort and stability
- Slip-resistant feet for added grip

### Suitable for Professional & Non-Professional use

Product Code	Treads	Closed Length (m)	Platform Height (m)	Safe Working Height (m)*	Weight (kg)
35331218	3	1.26	0.58	2.33	3.73
35431218	4	1.50	0.80	2.55	4.64
35531218	5	1.74	1.03	2.78	5.88
35631218	6	1.98	1.25	3.00	6.36
35731218	7	2.22	1.48	3.23	6.93
35831218	8	2.46	1.70	3.45	8.02

\*Based on 1.75m as the average reach height of a person.

## 2 Step




EN14183



Sturdy step for access to those 'just' out of reach areas.

## EASY TO USE

- Folds flat for easy storage
- Slip-resistant feet
- Sturdy platform and knee rail for safety

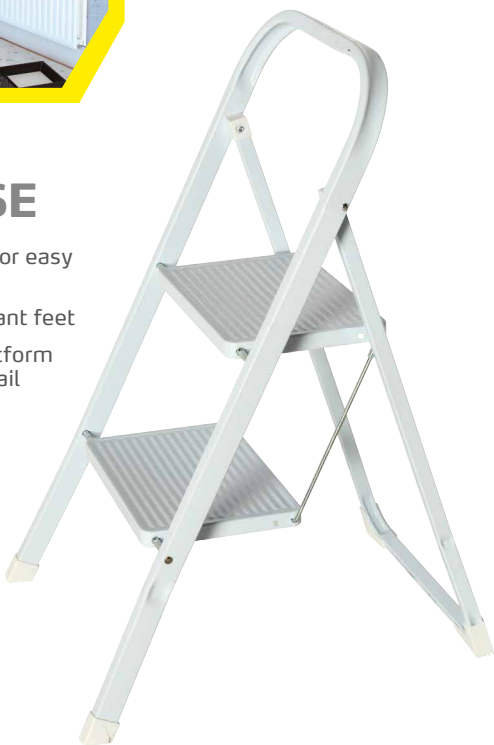

Product Code	Tread	Closed Length (m)	Platform Height (m)	Safe Working Height (m)*	Weight (kg)
30222100	2	0.86	0.42	2.17	5.0

\*Based on 1.75m as the average reach height of a person.

# Multi-Purpose



Load includes user & materials.



## VERSATILE & MULTI-FUNCTIONAL

- Simple click-lock hinge system
- Suitable for a wide variety of uses
- Stabiliser bars for stability
- Compact folded dimensions for easy transportation and storage



Product Code	Section x Rungs	Closed Length (m)	Weight (kg)
57670400	4 x 3	0.92	11.2
Mode	Max. Open Height (m)	Safe Working Height (m)*	
Stepladder	1.65	2.72	
Extension Ladder	3.38	4.03	

\*Based on 1.75m as the average reach height of a person.

# 3 in 1 Combination Ladder



Load includes  
user & materials.



## LIGHTWEIGHT & COMPACT

- Combines a stepladder, extension ladder and a stairwell ladder all in one product
- Heavy duty box section for regular use
- Slip-resistant rungs for comfort and security
- Non-slip feet
- Wide stabiliser for stability and safety



### Suitable for Professional & Non-Professional use

Product Code	Closed Length (m)	Weight (kg)
5101318	1.70	6.2
Mode	Open Length (m)	Safe Working Height (m)*
Extension Ladder	2.42	3.27
Stepladder	1.64**	2.73
Stairway Ladder	2.12**	3.02

\*Based on 1.75m as the average reach height of a person.

\*\*Open height (m).

# Combi 100 4 Way



Load includes  
user & materials.



EN131



## MULTI-FUNCTIONAL DESIGN

- Combines a large stepladder, extension ladder, stairwell ladder and freestanding extension ladder all in one product
- Box section stile profile designed to ensure lightest weight (light, but strong)

### Suitable for Professional & Non-Professional use

Product Code	Total Number of Rungs	Closed Length(m)	Mode	Open Length (m)	Safe Working Height (m)*	Weight (kg)
34038118	17	1.84	Extension Ladder	3.78	4.40	12.76
			Stepladder	1.72**	2.72	
			Extending Stepladder	2.79**	3.25	
			Stairway Ladder	2.79**	3.25	
34138118	23	2.40	Extension Ladder	5.18	5.76	16.26
			Stepladder	2.25**	3.25	
			Extending Stepladder	3.58**	4.04	
			Stairway Ladder	3.58**	4.04	
34238118	29	2.96	Extension Ladder	6.86	7.38	21.27
			Stepladder	2.78**	3.78	
			Extending Stepladder	4.63**	5.09	
			Stairway Ladder	4.63**	5.09	

\*Based on 1.75m as the average reach height of a person.

\*\*Open height (m).



# Pro-Deck® 5 Way



Load includes  
user & materials.



## GREAT FOR ALL ROUND USE

- Combines a stepladder, extension ladder, stairwell ladder, level platform and stair platform all in one product
- Self-locking catch prevents sections from separating
- Quick to set up and easy to use
- Rigid construction with wide base stabiliser for increased stability

### Suitable for Professional & Non-Professional use

Product Code	Closed Length (m)	Weight (kg)
5101518	1.55	16.8
Mode	Open Length (m)	Safe Working Height (m)*
Extension Ladder	2.40	3.37
Stepladder	1.49**	2.57
Stairwell Stepladder	2.05**	2.84
Level Platform	0.85***	2.60
Stair Platform	1.40***	3.15

\*Based on 1.75m as the average reach height of a person.

\*\*Open height (m).

\*\*\*Platform height (m).

# Trade 200



Load includes  
user & materials.



Made from box section profiles, this extension ladder is exceptionally robust and built to last.



## ROBUST AND BUILT TO LAST

- Easy, push-up operation
- Slip-resistant square rungs
- Unique wrap-around top clips have smooth-glide runners for reduced wear and tear
- Rung-clips secure sections together for safe use and transportation
- Wide stabiliser for added stability and safety

### Suitable for Professional & Non-Professional use

Product Code	Section × Rungs	Closed Length (m)	Open Length (m)	Safe Working Height (m)*	Weight (kg)
57011018	2 × 6	1.92	2.79	3.65	7.34
57011118	2 × 8	2.51	3.96	4.67	10.44
57011218	2 × 10	3.09	5.12	5.76	12.57
57011318	2 × 12	3.67	6.28	6.85	16.22
57011418	2 × 14	4.25	7.44	7.94	21.49
57011518	2 × 16	4.83	8.60	9.03	24.36
57011618	2 × 18	5.41	9.76	10.12	32.95
57012018	3 × 6	1.93	3.96	4.77	14.09
57012118	3 × 8	2.51	5.70	6.31	15.76
57012218	3 × 10	3.09	7.44	7.94	22.36
57012718	3 × 11	3.38	8.31	8.57	25.33
57012318	3 × 12	3.67	9.18	9.58	30.17
57012418	3 × 14	4.25	10.63	10.94	37.45

\*Based on 1.75m as the average reach height of a person.

# S200 Fibreglass Ladders



Load includes  
user & materials.



BS EN131



Non-conductive stiles  
- ideal for working  
around electricity.

## ROPE-OPERATED & HEAVY DUTY

- Alflo rung joints offer twist-proof performance
- Heavy duty rope pulley for safe operation
- Non-conductive fibreglass stiles
- Semi-automatic locks
- Slip-resistant rungs
- Moulded foot brace for strength and protection against damage
- Slip-resistant articulated feet for maximum ground contact



Product Code	Section × Rungs	Closed Length (m)	Open Length (m)	Safe Working Height (m)*	Weight (kg)
52780800	2 × 8	2.45	3.90	4.48	14.5
52781000	2 × 10	3.03	5.06	5.60	17.2
52781200	2 × 12	3.61	6.22	6.72	20.1
52781500	2 × 15	4.48	7.96	8.40	28.4

\*Based on 1.75m as the average reach height of a person.

# Telescopic Ladders

**150 KG**  
MAX. LOAD

Load includes  
user & materials.



EN131



This adjustable telescopic ladder has a smaller folded size than standard extension ladders. Ideal for trade and professional use.

## EASY TO TRANSPORT AND STORE

- Safety grip wall bumpers for firmer grip and stability
- Extra rung spacing to prevent finger trapping
- Lock indicators for increased safety
- Automatic locking mechanism for convenience and security
- Single handed unlocking system
- Slip-resistant rungs



Product Code	Section x Rungs	Closed Length (m)	Open Length (m)	Safe Working Height (m)*	Weight (kg)
30113318	1 x 10	1.01	3.21	3.74	10.4
30113818	1 x 12	1.10	3.77	4.33	12.5

\*Based on 1.75m as the average reach height of a person.

# LadderLok



Conveniently stores your ladder and keeps it secure. Includes padlock and locking bar.



## SAFE AND SECURE

Product Code	Description	Suitable For	Weight (kg)
31589800	LadderLok (Pair)	Extension, Combination, Stepladders	1.2

# Ladder Rack Clamp



The Ladder Rack Clamp ensures safe and easy transportation of most ladders on a motor vehicle, freeing up interior vehicle space.

## SAFE & EASY TRANSPORTATION



Product Code	Description	Suitable For	Weight (kg)
30389800	Ladder Rack Clamp (Pair)	Extension Ladders	2.3

## Roof Hook



Sturdy wheeled top helps move the ladder up the roof and into position.

FITS TO MOST  
**EXTENSION**  
LADDERS



Product Code	Description	Suitable For	Weight (kg)
30489800	Roof Hook	Extension Ladders	3.1

## Ladder Stay



The Ladder Stay positions the ladder away from the wall, making working at height easier whilst preventing damage to gutter, tiles, and window frames.

FITS TO MOST  
**EXTENSION**  
LADDERS



Product Code	Description	Suitable For	Weight (kg)
30087000	Ladder Stay	Extension Ladders	1.6

## Single Section Roof Ladders



Load includes  
user & materials.



Safety Tested



Designed for roofs pitched up to 55°. Fitted with ridge hook assembly, support bearers and wheels, this ladder is easily positioned and secure in use.

### WITH RIDGE HOOK ASSEMBLY

- Suitable for roof slopes of between 15° and 55°
- Fitted with ridge hook assembly and support bearers for safety
- Ridge hook assembly fits onto central ridge of roof
- Wheels for easy manoeuvring
- Square rungs and lightweight stiles



Product Code	Section x Rungs	Length Without Hook (m)	Length With Hook (m)	Weight (kg)
57665200	1 x 14	4.24	4.53	15.4
57666700	1 x 18	5.40	5.69	20.1
57666900	1 x 20	5.98	6.27	23.4



# Double Section Roof Ladders




Load includes  
user & materials.



Safety Tested



Designed to be a longer but more compact product that is lighter to maximise manoeuvrability and storage without losing any strength.

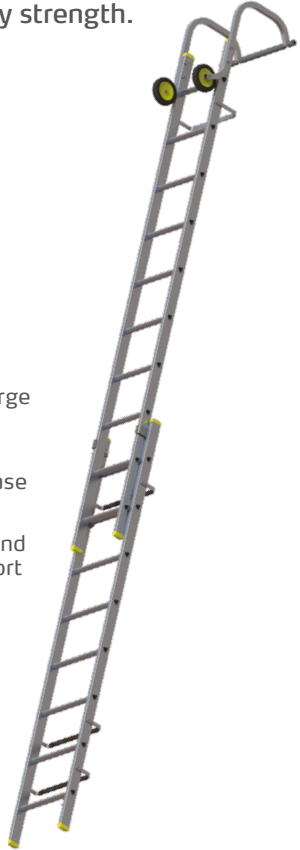

## LIGHTWEIGHT & COMPACT

- Heavy-duty roof hook with large non-slip rubber end bar for a superior apex fit
- Optimum weight frame for ease of positioning
- Heavy-duty locking catches and non-slip rubber sleeved support bars for roof protection
- Large wheels with low rolling resistance
- Suitable for roof slopes of between 15° and 55°

Product Code	Total Number of Rungs	Closed Length (m)	Open Length (m)	Weight (kg)
57663000	8 + 10	3.21	4.89	13.1
57663600	10 + 12	3.77	6.01	14.8
57664000	12 + 14	4.33	7.13	16.8
57664600	14 + 16	4.89	8.25	18.5

## Odd Job 600



Load includes user & materials.



Safety Tested



## EXTRA-DEEP SQUARE PLATFORM



- Extra-large slip-resistant platform
- Locking hinges for safety
- Lightweight and easy to transport
- Splayed base for stability
- Compact folded dimensions for easy storage

Product Code	Folded Size (m)	Platform Size (m)	Platform Height (m)	Safe Working Height (m)*	Weight (kg)
31289800	0.63 x 0.68 x 0.18	0.60 x 0.60	0.5m	2.25	5.7

## Odd Job



Load includes user & materials.



Safety Tested



## COMPACT, LIGHTWEIGHT



- Simple and safe to use with locking hinges for added safety whilst working
- Compact folded dimensions for easy storage
- Non-slip platform
- Lightweight and easy to transport

Product Code	Folded Size (m)	Platform Size (m)	Platform Height (m)	Safe Working Height (m)*	Weight (kg)
31089818	0.7 x 0.4 x 0.16	0.3 x 0.6	0.5m	2.25	3.7

\*Based on 1.75m as the average reach height of a person.

# Eco S Line




Load includes  
user & materials.



EN14975



3 section folding timber loft ladder with an insulated draught-proof hatch.

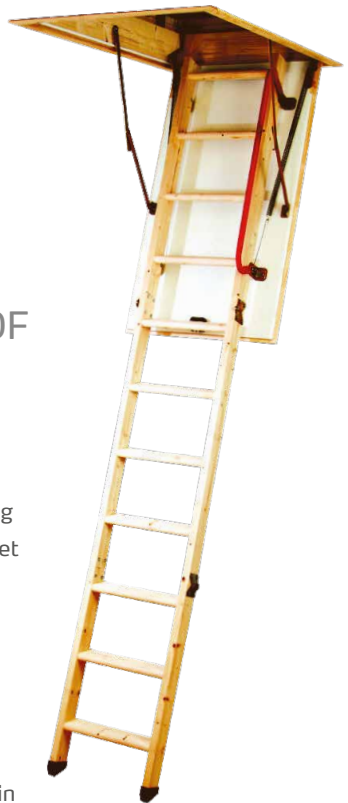

## INSULATED DRAUGHT-PROOF HATCH

- Solid spruce timber ladder
- Rubber draught excluder
- Handrail to aid safe climbing
- Slip-resistant treads and feet
- Easy use; timber stowing pole
- Fits in UK standard 0.6m joist centres
- White-faced trapdoor with high-insulating design
- Requires no arc space for clearance or storage space in the loft

Product Code	Max. Floor to Ceiling Height (m)	Hatch Casing Size L x W x D (m)	Steps	Weight (kg)
34535000	2.81	1.13 x 0.55 x 0.14	3 x 4	26.0
34635000	Timber Extension Kit (extends floor to ceiling height to 3.51m)			

# Timberline



Load includes  
user & materials.



EN14975



A complete loft access solution including a white-faced 26mm insulated trapdoor.



## HIGH QUALITY TIMBER CONSTRUCTION

- Comes complete with loft ladder, trapdoor, loft surround and all fittings
- Fully insulated trapdoor prevents loss of heat and draughts
- Ladder stows within trapdoor so no loft floor space or headroom in the loft is used
- Spring-assisted stowage for smooth opening and closing
- Slip-resistant treads for comfort when climbing

Product Code	Max. Floor to Ceiling Height (m)	Hatch Casing Size L x W x D (m)	Steps	Weight (kg)
34530300	2.80	1.13 x 0.55 x 0.12	3 x 4	23.0
34635000	Timber Extension Kit (extends floor to ceiling height to 3.50m)			

# Spacemaker

**150 KG**  
MAX. LOAD

Load includes  
user & materials.



BS EN14975



Lightweight but sturdy  
2 section sliding design.



## LIGHTWEIGHT & EASY TO INSTALL

- Wide, slip-resistant steps for comfort when climbing
- Unique shoot bolt fastening for safe and ease use
- Slip-resistant rubber feet
- Complete with all fittings

Product Code	Max. Floor to Loft Floor Height (m)	Min. Floor to Loft Floor Height (m)	Min. Hatch Size (m)	Steps
30234000	2.60	1.45	0.46 x 0.41	2 x 5
Clearance In Loft (m)			Weight (kg)	
Vertical	Horizontal			
0.86	1.22			
			5.0	

# Easiway



Load includes  
user & materials.



BS EN14975



Compact lightweight design - requires less storage space in the loft.

## IDEAL IN RESTRICTED SPACES

- Handrail for comfort and safety while climbing
- Easy to use and smooth to glide when lowering or stowing the ladder
- Unique shoot bolt fastening for safety and ease of use
- Wide and comfortable steps
- Slip-resistant rubber feet



Product Code	Max. Floor to Loft Floor Height (m)	Min. Floor to Loft Floor Height (m)	Min. Hatch Size (m)	Steps
31334000	3.00	2.30	0.51 × 0.43	3 x 4
Clearance In Loft (m)			Weight (kg)	
Vertical	Horizontal			
0.75	1.05			7.0

# Deluxe



Load includes  
user & materials.



BS EN14975



The sturdy and heavy duty 2 section sliding loft ladder.



## TWIN HANDRAILS FOR SECURE CLIMBING

- Spring assisted pivot arm for smooth gliding when lowering or stowing the ladder
- Solid design made from heavy duty aluminium profiles
- Deep and slip-resistant steps for comfort and security
- Ladder attaches to loft hatch for easier loft withdrawal

Product Code	Max. Floor to Loft Floor Height (m)	Min. Floor to Loft Floor Height (m)	Min. Hatch Size (m)	Steps
30634000	3.25	2.31	0.67 x 0.51	8 + 6
Clearance In Loft (m)			Weight (kg)	
Vertical	Horizontal			
1.03	1.60			



# Telescopic Loft Ladders



Load includes  
user & materials.



Ideal for small hatches  
with minimal storage  
space.

## COMPACT DESIGN FOR SMALL TIGHT SPACES

- Adjustable to 3 lengths
- Automatic locking and release
- Manufactured in anodised aluminium
- No cutting required
- Easy to install and operate
- Extra-wide steps for comfort and security
- Rubber feet for safety and protection to flooring



Product Code	Max. Floor to Loft Floor Height (m)	Min. Floor to Loft Floor Height (m)	Min. Hatch Size (m)	Steps	Clearance In Loft (m)		Weight (kg)
					Vertical	Horizontal	
30100000	2.61	2.17	0.60 x 0.51	9	0.24	0.24	12.0
30100100	2.88	2.43	0.60 x 0.51	10	0.24	0.24	13.0

# MiniMax®




Load includes  
user & materials.



## HEAVY DUTY TRADE PLATFORM AND TOWER SYSTEM

- Compact Base Pack fits through standard doors, corridors and into your van
- 260mm rung spacing for safe climbing
- Adjustable platform height
- Snap-click fittings for easy assembly
- Easy to transport and store
- Swivel locking castors enable tower to be moved easily
- Modular lightweight system transforms to working heights of up to 7.8m

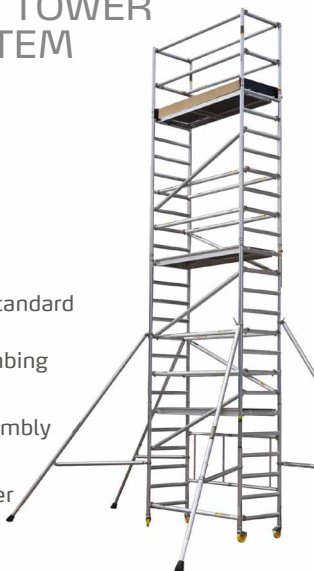

Composite Code		38060600	38060900	38061700	38063700	38065800	
Safe Working Height (m)*		2.6	2.9	3.7	5.7	7.8	
Platform Height (m)		0.6	0.9	1.7	3.7	5.8	
Product Code	Component Name	Weight (kg)	Quantities				
37051800	Base Pack	34	1	1	1	1	1
37251900	1 Rung Guardrail Pack	8	—	1	—	—	—
37251800	2 Rung Guardrail Pack	16	—	—	1	1	1
34151800	2m Extension Pack	47	—	—	—	1	2
31751300	SP7 Stabiliser (Small)	3.8 ea	—	—	4	4	—
31851300	SP10 Stabiliser (Medium)	8.8 ea	—	—	—	—	4
37951800	Adjustable Leg Pack	5	1	1	1	1	1
39451800	Toe Board Pack	5	1	1	1	1	1

\*Based on a 2m height and reach of a person whilst standing on the highest level platform.



**Youngman®**

A WernerCo brand

Blackwater Trading Estate,  
The Causeway  
Maldon, Essex  
CM9 4LJ

**01621 745 900**

**[uk.customercare@wernerco.com](mailto:uk.customercare@wernerco.com)**

**[youngmanaccess.com](http://youngmanaccess.com)**

©2019 WernerCo Rev. 01/19