


Pipeseal

A how-to guide to installing a Pipeseal.

	Step 1 Place pipe seal over the top of the pipe and cut with a knife or scissors to ensure a snug fit.
	Step 2 Stretch boot over the pipe until the flange touches the deck, mark the perimeter with a crayon or similar, allowing an additional 2cm.
	Step 3 Fold the pipe boot up or remove and apply primer to the marked area using the quick scrubber pad and handle, allow to dry.
	Step 4 Reposition pipe seal, locate the join in the release paper and slowly remove at a shallow angle smoothing as you go with your hand. Once the backing paper has been totally removed roller using silicone roller.

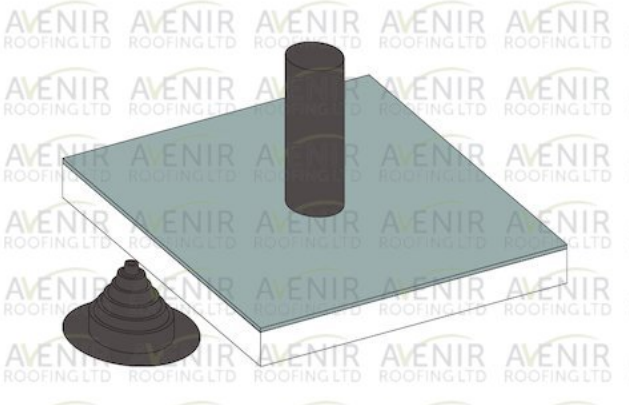

Step 5

Apply a small bead of silicone sealant to the top of the pipe seal and secure with jubilee clip.